

TAYLOR TUBES Are Sold Through Distributors

There is a TAYLOR TUBE Distributor in every logical distribution point throughout the United States and in many foreign countries. It has been made possible for Industrial and Broadcast Engineers and Amateur Radio Operators easily to obtain almost any type of TAYLOR TUBE listed in this catalog. This is because the distribution is limited so that each Distributor has a sufficiently large market to enable him to carry a *complete* line of TAYLOR TUBES.

Every TAYLOR TUBE Distributor has been selected with full consideration of his proven

ability as well as his reputation for fair dealing. It is a matter of pride that TAYLOR TUBE Distributors not only sell our product—they recommend it above *all others*.

The TAYLOR TUBE Distributor in your area is the best source for complete technical information on Electronic Tubes and Apparatus. He will give you prompt service on your requirements.

We welcome the opportunity to send you the name of the *leading* radio parts house in your vicinity. There is a TAYLOR TUBE Distributor near you!

TAYLOR TUBE RATINGS HAVE FCC APPROVAL

Taylor Tubes Are Licensed by RCA and G. E.

INDEX

	Page		Page
873	2	813	17
TT-17	3	803	18
875-A	4	203-Z	19
872-A	4	838	19
866-A	5	T-20	20
249-B	6	TZ-20	21
866 Jr. (2B26)	6	T-55	22
822-822S	7	T-60	23
T-40	8	T-100	23
TZ-40	9	830-B	23
810	10	TR-40M	23
T-125-T-124	11	814	24
T-200	12	841-SW	24
805	13	HD-203A	24
203-A	14	HD-211C	24
211-211-D	14	General Tube Information	25 to 31
211-C	15	How To Choose A Tube	25
845	15	L/C Ratio	28-29
T-21	16	Rectifier Information	31
282-A	16	Interchangeability Chart	32

Taylor

CUSTOM
BUILT

Tubes



FRANK J. HAJEK, W9ECA
President



REX L. MUNGER, W9LIP
Sales Manager

“TAYLOR TUBES”—ASK ANY ELECTRONIC ENGINEER!

TAYLOR TUBES, Inc., presents this 1945 edition of its famous Tube Manual to Radio Engineers and Technicians in the Armed Services and the War Industries with the hope that the complete, up-to-date information and technical data will prove helpful in the selection of the right tube for each application and to obtain the highest efficiency from the tube itself. More complete information on each standard type is available, and your inquiries are invited on those or any special types.

The TAYLOR TUBE Engineering Department is geared to provide fast action for you on any special tube problem or requirement.

TAYLOR TUBES is bending every effort to meet Military and Naval requirements. Its facilities have been expanded 100% and its thoughts are devoted to the greatly increased production and improved quality of electronic tubes for the Services.

After our Victory is achieved, TAYLOR TUBES will offer tubes in a widely extended utility range. TAYLOR TUBES, Inc., has since 1936 maintained constant leadership in bringing its customers new values.

TAYLOR TUBES WILL CONTINUE TO SET THIS PACE!

**TAYLOR
TUBES
ARE
ALL OUT FOR
VICTORY!**



JOSEPH F. HAJEK
Secretary



JERRY WOREL
Treasurer

Taylor

CUSTOM
BUILT

Tubes

873

GRID CONTROL MERCURY VAPOR
RECTIFIER

REPLACES 973 AND FG-27

\$17.25



873

Grid control Rectifier tubes (thyratrons) are the most versatile of electronic tubes. The wide range of usefulness of these tubes is due to remarkable sensitivity, high operating speed, great durability as a rapid-duty contactor and general adaptability to automatic operations. The Taylor 873 has a wide range of uses in the newer industrial electronic apparatus. The new, more rugged design insures successful operation under the most difficult conditions.

GENERAL CHARACTERISTICS

Number of Electrodes.....	3
Filament- Cathode Coated.....	
Voltage, volts.....	5.0
Current, amps.....	6.75
Heating Time, sec.....	45

Single Phase—Half-Wave Circuit—1 Tube

Anode Voltage:	
Maximum Peak Inverse Voltage, volts.....	3000
Maximum Peak Forward Voltage, volts.....	3000

Maximum Anode Current:	
Instantaneous, amps.....	10.0
Average, amps.....	2.5
Surge (should not last longer than 1 sec.), amps.....	90.0

Single Phase—Full Wave Circuit—2 Tubes

Anode Voltage:	
Maximum Peak Inverse Voltage per tube, volts.....	10000
Maximum Peak Forward Voltage per tube, volts.....	3000

Maximum Anode Current:	
Instantaneous per tube, amps.....	10.0
Average per tube, amps.....	1.25
Surge (should not last longer than 1 sec.), amps.....	90.0
Maximum Time of Averaging Anode Current, sec.....	15

Maximum Grid Current:	
Instantaneous,† amps.....	1.0
Average, amps.....	25
Tube Voltage Drop, volts.....	10-15

Approximate Starting Characteristics at Cond. Mercury Temp. of 50° C.	
D. C. Anode Voltage	Grid Voltage
70	0
100	-3
1000	-5.5

Temperature Limits:	
Condensed Mercury Temperature.....	40 to 80 C
Ambient Temperature Range.....	25 to 65 C
Defolization Time—approximate.....	1000 microsec
Ionization Time.....	10 microsec

Dimensions:	
Maximum Length.....	8 1/2"
Diameter.....	2 1/8"
Bulb.....	T-16
Cap.....	Medium metal
Type of Cooling.....	Air
Base.....	4 Pin Jumbo

The filament should be allowed to come up to operating temperature before the plate voltage is applied.
†When operating at a frequency of less than 25 cycles, the maximum instantaneous current is reduced to twice the average current rating.
Return leads from anode and grid circuits should be connected to the center tap of the filament transformer winding when A.C. is used on the filament. If D.C. is used the return should be made to the negative filament terminal.

The defolization time of this type of tube is too long to allow it to be used with satisfaction for inverter circuits.

All mercury vapor or gas filled tubes require protective resistances in the grid and anode circuits to limit the current in these circuits to the rated value.

INSTALLATION


The base of the Taylor 873 is designed for mounting in a standard "50 watt" socket. The tube should always be mounted vertically with ample air space provided for ventilation. The ambient temperature should not be less than 25° C (77° F) and not more than 65° C (149° F) for the maximum peak inverse voltage. When the maximum ambient temperature exceeds these limits, forced ventilation should be used.

The filament of the 873 should be operated on alternating current at the rated value of 5.0 volts. The socket should make good contact to the tube pins and adequate current-carrying capacity leads to the secondary winding of the power transformer should be used. Operation of the filament at less than the rated voltage may result in a high internal voltage drop with subsequent loss of emission. A filament voltmeter should be connected permanently across the filament circuit at the socket terminals in order that the filament voltage can be maintained at 5.0 volts.

Because the mercury may be splashed on the tube elements due to shipment or handling, the filament of the 873 should be operated at rated voltage for approximately 3 minutes without plate voltage in order to distribute the mercury properly when the tube is first placed in service. The above procedure need not be repeated unless the tube is removed from the socket and during handling the mercury becomes splashed on the tube elements.

The condensed mercury temperature should be at least 25° C before the plate voltage is applied. This may be ordinarily accomplished by introducing a time lag of at least 45 seconds between the application of the filament and the plate voltages. In event that arcbreak should occur when the plate voltage is applied, the pre-heating time of the filament should be increased.

When the 873 is subjected during operation to external high voltage or high frequency fields, shielding and R-F filter circuits should be provided.

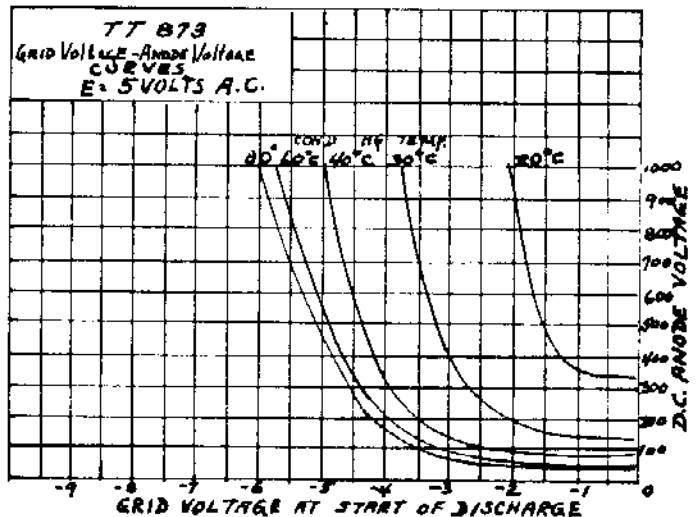

TT-17

Grid control rectifier tubes (thyatrons) are the most versatile of electronic tubes. The wide range of usefulness of these tubes is due to remarkable sensitivity, high operating speed, great durability as a rapid-duty contactor and general adaptability to automatic operations. The Taylor TT-17 has a wide range of uses in the new industrial electronic apparatus. The new, more rugged design insures successful operation under the most difficult conditions.

INSTALLATION

The base of the Taylor TT-17 is designed for mounting in a standard four-prong socket. The tube should always be mounted vertically with ample air space provided for ventilation. The ambient temperature should not be less than 25° C (77° F) and not more than 65° C (149° F) for the maximum peak inverse voltage. When the maximum ambient temperature exceeds these limits, forced ventilation should be used.

The filament of the TT-17 should be operated on alternating current at the rated value of 2.5 volts. The socket should make good contact to the tube pins and adequate current-carrying capacity leads to the secondary winding of the power transformer should be used. Operation of the filament at less than the rated voltage may result in a high internal voltage drop with subsequent loss of emission. A filament voltmeter should be connected permanently across the filament circuit at the socket terminals in order that the filament voltage can be maintained at 2.5 volts.

Because the mercury may be splashed on the tube elements due to shipment or handling, the filament of the TT-17 should be operated at rated voltage for approximately 3 minutes without plate voltage in order to distribute the mercury properly when the tube is first placed in service. The above procedure need not be repeated unless the tube is removed from the socket and during handling the mercury becomes splashed on the tube elements.

The condensed mercury temperature should be at least 25° C before the plate voltage is applied. This may be ordinarily accomplished by introducing a time lag of at least 30 seconds between the application of the filament and the plate voltages. In event that arc-back should occur when the plate voltage is applied, the pre-heating time of the filament should be increased.

When the TT-17 is subjected during operation to external high voltage or high frequency fields, shielding and R-F filter circuits should be provided.



TT-17

GRID CONTROL MERCURY VAPOR
RECTIFIER

REPLACES FG-17 AND 967 TYPES

\$6.00

GENERAL CHARACTERISTICS

Number of Electrodes.....	3
Filament—Oxide Coated:	
Voltage, volts	2.5
Current, amps.	5.0
Heating Time, approx., sec.....	5

Single Phase—Half-Wave Circuit—1 Tube

Anode Voltage:	
Maximum Peak Inverse Voltage, volts.....	2500
Maximum Peak Forward Voltage, volts.....	2500
Maximum Anode Current:	
Instantaneous, amps.	2.0
Average, amps.50
Surge (should not last longer than 1 sec.), amps.....	20

Single Phase—Full-Wave Circuit—2 Tubes

Anode Voltage:	
Maximum Peak Inverse Voltage per tube, volts.....	7500
Maximum Peak Forward Voltage per tube, volts.....	2500
Maximum Anode Current:	
Instantaneous per tube, amps.....	2.0
Average per tube, amps.....	.25
Surge (should not last longer than 1 sec.), amps.....	20
Maximum Time of Averaging Anode Current, sec.....	15
Maximum Grid Current:	
Instantaneous,† amps.25
Average, amps.05
Tube Voltage Drop, volts.....	10-24

Approximate Starting Characteristics:

D. C. Anode Voltage	Grid Voltage
30	0
100	-2.25
1000	-5.0

Temperature Limits:

Condensed Mercury Temperature.....	40 to 80 C
Ambient Temperature Range.....	25 to 65 C
Deionization Time—approximate.....	1000 microsec
Ionization Time.....	10 microsec

Dimensions:

Maximum Length658"
Diameter275"
Bulb	S-19
Cap	Medium metal
Base.....	Medium 4 pin bayonet
Type of Cooling.....	Air


*The filament should be allowed to come up to operating temperature before the plate voltage is applied.

†When operating at a frequency of less than 25 cycles, the maximum instantaneous current is reduced to twice the average current rating.

Return leads from anode and grid circuits should be connected to the center tap of the filament transformer winding when A-C is used on the filament. If D-C is used the return should be made to the negative filament terminal.

The deionization time of this type of tube is too long to allow it to be used with satisfaction for inverter circuits.


All mercury vapor or gas filled tubes require protective resistances in the grid and anode circuits to limit the current in these circuits to the rated values.

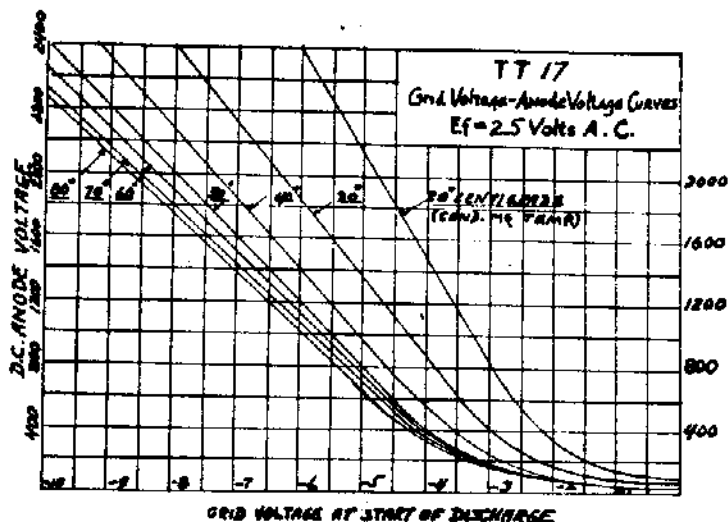

Taylor

CUSTOM
BUILT

Tubes

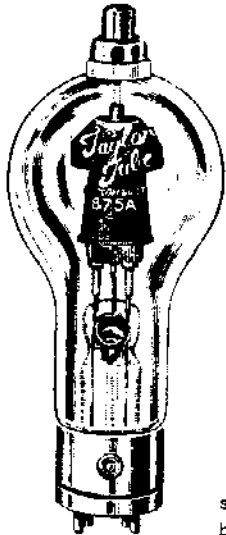

875-A

CARBON ANODE AND SHIELD

HALF-WAVE

MERCURY VAPOR

RECTIFIER TUBE

*For Broadcast Stations and
Induction Heating Apparatus*

\$30.00

This new and greatly improved Taylor design incorporates the use of a Processed Carbon Anode and shield. This type is widely used in commercial services. A performance test will thoroughly prove the superiority of Taylor's 875-A's.

GENERAL CHARACTERISTICS

Filament Volts	5
Filament Current, amps.....	10
Heating time, seconds.....	30

Overall Dimensions

Maximum Height, inches.....	10 1/4
Maximum Diameter, inches.....	3 1/8
50 Watt Base	Nonex Glass

Max. Peak Inverse Voltage

Condensed Mercury Temperature 20° to 50° C.....	15,000
Condensed Mercury Temperature 20° to 60° C.....	10,000
Max. Peak Plate Current, amps.....	6
Max. Average Plate Current, amps.....	1.5
Approx. Tube Voltage Drop, volts.....	10

TYPICAL CIRCUIT—MAXIMUM CONDITIONS

	R.M.S. Input Volts	Max. D.C. Output Volts Amps.
Single phase full wave (2 tubes).....	5300	4750 3
Single phase bridge (4 tubes).....	10600	9500 3
Three phase half wave (3 tubes).....	6120	7150 4.5
Three phase parallel double Y (6 tubes).....	6120	7150 9
Three phase full wave (6 tubes).....	6120	14300 4.5

Special Note

In transit mercury in tube splatters over filament—therefore when first placing this tube into operation filament should be lighted for fully 15 minutes to allow mercury to condense to bottom of bulb.

HALF-WAVE
MERCURY VAPOR
RECTIFIER TUBES

New Low Price!

872-A — 8008

\$7.50

\$7.00



This new and greatly improved Taylor design incorporates the use of a Processed Carbon Anode and shield. Tried and proven in actual broadcast station use. A performance test will thoroughly prove the superiority of Taylor 872-A's. In a single phase full wave rectifier, with choke input, two 872-A's will deliver up to 2.5 amps. at 3200 volts D.C. Multi-strand filament. Ratings for the 872-A and 8008 are identical.

GENERAL CHARACTERISTICS

Filament Volts	5
Filament Current, amps.....	6.75
Heating Time, seconds.....	30

Overall Dimensions

Maximum Height, inches	8 1/4
Maximum Diameter, inches	2 1/8
	Nonex Glass

872-A has a standard 50 watt base. The 8008 has the industrial type long prong 50 watt base—fits a Johnson No. 244 socket.

Max. Peak Inverse Voltage

Condensed Mercury Temperature 20° to 60° C.....	10,000
Condensed Mercury Temperature 20° to 70° C.....	5,000
Max. Peak Plate Current, amps	5.0
Max. Average Plate Current, amps	1.25

TYPICAL CIRCUIT—MAXIMUM CONDITIONS

	R.M.S. Input Volts	Max. D.C. Output Volts Amps.
Single phase full wave (2 tubes).....	3530	3150 2.5
Single phase bridge (4 tubes).....	7060	6360 2.5
Three phase half wave (3 tubes).....	4080	4780 3.75
Three phase parallel double Y (6 tubes).....	4080	4760 7.5
Three phase full wave (6 tubes).....	4080	4780 3.75

Special Note

In transit mercury in tube splatters over filament—therefore when first placing this tube into operation filament should be lighted for fully 15 minutes to allow mercury to condense to bottom of bulb.

The single-phase half-wave circuit of Figure 1 is not very popular due to the fact that the ripple is of greater magnitude and being of lower frequency than other systems is more difficult to filter. With choke input, the DC voltage will be approximately .45 that of the r.m.s. voltage E. Figure 2 illustrates the full-wave single-phase circuit which every amateur is familiar with. Figure 3 is identical in nature with Figure 2, except that four tubes (more if desired) are used to obtain higher current output. The resistors shown in the plate circuits of these tubes are very essential; otherwise one tube will generally take most of the load with the natural result that the tube life is greatly decreased; a drop of about six volts across these resistors will insure stability. Figure 4 shows a bridge circuit with four tubes, its advantage is that high DC voltages can be secured without expensive (high peak inverse voltage) tubes and with low voltage transformers. For full-wave rectification the DC voltage can be increased by using the entire secondary output of the plate transformer, in fact, the voltage will be exactly doubled; of course, this halves the current output due to the transformer current carrying limitations. Figures 5 and 6 are similar to that of Figure 2, except that they apply to three-phase circuits. In the circuit of Figure 5, each tube carries current for one-third cycle. The circuit of Figure 6 is very commonly employed in high power transmitters where three-phase power is available due to the high DC output voltage attained. This circuit has the added advantage that the ripple frequency is high, being six times the supply frequency, allowing simple filtering.

Figure No.	Transformer Volts E	DC Output Volts at Input to Filter	DC Output Current in Amperes
1	.7 x Inv. Pk. Vtg.	.45 x E	.33 x Pk. Plate
2	.35 x Inv. Pk. Vtg.	.9 x E	.66 x Pk. Plate
3	.35 x Inv. Pk. Vtg.	.9 x E	1.32 x Pk. Plate
4	.7 x Inv. Pk. Vtg.	.9 x E	.66 x Pk. Plate
5	.43 x Inv. Pk. Vtg.	1.12 x E	.83 x Pk. Plate
6	.54 x Inv. Pk. Vtg.	2.25 x E	1.0 x Pk. Plate



866-A

HALF-WAVE MERCURY VAPOR RECTIFIER

\$1.50

There are more Taylor 866/866-A Tubes in use than any other brand.

Taylor 866-A uses the famous Taylor multi-strand filament which has twice the usual emitting surface. The ceramic insulator between the plate cap and the glass gives increased voltage breakdown protection.

GENERAL CHARACTERISTICS

Filament Volts.....	2.5
Filament Current, amps.....	5.0

Overall Dimensions

Maximum Height, inches.....	6 1/4
Maximum Diameter, inches.....	2 1/4

UX 4 Prong Base

Max. Peak Inverse Voltage	
Condensed Mercury Temperature 20° to 60° C, volts.....	10,000
Condensed Mercury Temperature 20° to 70° C, volts.....	5,000
Max. Peak Plate Current, amps.....	1.0
Max. Average Plate Current, amps.....	0.25

TYPICAL CIRCUIT—MAXIMUM CONDITIONS

	R.M.S. Input Volts	Max. D.C. Output Volts	Amps.
Single phase full wave (2 tubes).....	3530	3180	0.5
Single phase bridge (4 tubes).....	7060	6360	0.5
Three phase half wave (3 tubes).....	4080	4780	0.75
Three phase parallel double Y (6 tubes).....	4080	4780	1.5
Three phase full wave (6 tubes).....	4080	9560	0.75

Special Note

In transit mercury in tube splatters over filament—therefore when first placing this tube into operation filament should be lighted for fully 15 minutes to allow mercury to condense to bottom of bulb.

STANDARD RECTIFIER CIRCUITS




FIG. 1




FIG. 2




FIG. 3

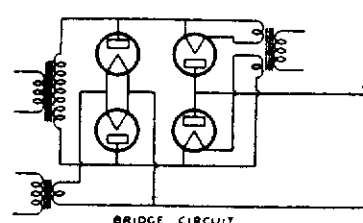


FIG. 4




FIG. 7

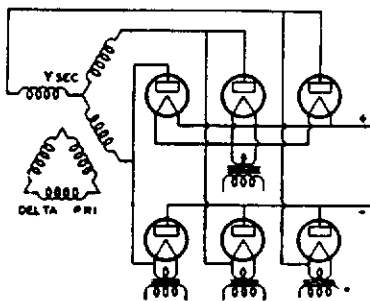


FIG. 6

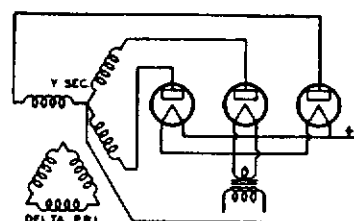


FIG. 5




FIG. 9





FIG. 8

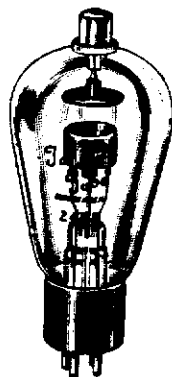

249-B

NEW! . . . BETTER!

HALF-WAVE
MERCURY VAPOR
RECTIFIER TUBE

New Low Price!

\$5.00

This new Rectifier tube uses a Processed Carbon Anode and shield together with the recognized advantages of Taylor's Multi-strand filament. The ceramic insulator between the plate cap and the glass gives increased voltage breakdown protection. 249-B's are widely used in Commercial Transmitters and during the past year many Taylor 249-B's went into this service with success. The Taylor 249-B is an exact replacement for tubes with the same type number.


GENERAL CHARACTERISTICS

Filament Volts.....2.5
Filament Current, amps.....7.5

Overall Dimensions

Max. Height, inches.....6 1/2
Max. Diameter, inches.....2 1/2
Nonex Glass

UX 4 Prong Base
(See Drawing)



Max. Peak Inverse Voltage

Condensed Mercury Temperature 20° to 60° C, volts.....10,000
Condensed Mercury Temperature 20° to 70° C, volts.....5,000
Max. Peak Plate Current, amps.....1.5
Max. Average Plate Current, amps.....0.375

TYPICAL CIRCUIT—MAXIMUM CONDITIONS

	R.M.S. Input Volts	Max. D.C. Output Volts Amps.
Single phase full wave (2 tubes).....	3530	3180 .750
Single phase bridge (4 tubes).....	7060	6360 .750
Three phase half wave (3 tubes).....	4080	4780 1.12
Three phase parallel double Y (6 tubes).....	4080	4780 2.25
Three phase full wave (6 tubes).....	4080	9560 1.12

258-B — \$6.00

Replaces tube with same type number and has same electrical and physical characteristics as 249-B except base has two 1/4 inch prongs only. Fits W.E. type 138-B socket.

Special Note

In transit mercury in tube splatters over filament—therefore when first placing this tube into operation filament should be lighted for fully 15 minutes to allow mercury to condense to bottom of bulb.

866 JR.

(2B26)

HALF-WAVE
MERCURY VAPOR RECTIFIER

\$1.00



The 866 Jrs. fill a real need for intermediate power requirements. They are intended to be used as rectifiers in power supplies of from 600 to 1000 volts D.C. where the receiving type full-wave rectifiers will not stand up and where the power capabilities of the Heavy Duty 866's are not necessary. The smaller size of the 866 Jrs. is another feature that will prove to be of great advantage in the layout of compact power supplies.

Fil. Volts 2.5
Fil. Current, Amps..... 2.5
Peak Inverse Volts.....5000
Peak Plate Current, ma..... 500
Av. Plate Current, ma..... 125
Tube Volt Drop, Approx..... 15
Max. Size 5 1/4 in. x 2 1/4

UX Ceramic Base

Connect Plate Terminal to Usual Position Standard On All UX Bases

866 JR.

The 866 Jr. uses the multi-strand filament introduced by TAYLOR TUBES. The multi-strand filament construction used in TAYLOR rectifiers has twice the emitting surface of the nickel alloy ribbon type filaments used in ordinary rectifiers.

BLEEDER RESISTOR SPECIFICATIONS

Output Voltage	Resistance In Ohms	Actual Dissi- pated Power In Watts	Recommended Resistor Wattage Rating
500	25,000	10	25
1,000	50,000	20	50
1,500	75,000	25	50
2,200	100,000	40	100
3,000	200,000	45	100

A heavy-duty resistor should be connected across the output of a filter in order to draw some load current at all times. This resistor avoids soaring at no load when swinging choke input is used and also provides a means for discharging the filter condensers when no external vacuum-tube circuit load is connected to the filter. This bleeder resistor should normally draw approximately 10 per cent of the full load current. The above table gives suitable values of bleeder resistors for power supply systems with from 500 to 3000 volts output.

GENERAL CHARACTERISTICS


Filament Volts	10
Filament Current, amps.....	4
Amplification Factor	30
Plate Dissipation, watts.....	200

Interelectrode Capacities

Grid-Plate, mmf.....	13.5
Grid-Filament, mmf.....	8.5
Plate-Filament, mmf.....	2.1

Overall Dimensions

Maximum Length, inches.....	9
Maximum Diameter, inches.....	2 3/4
Standard 50 Watt Base	Nonex Glass

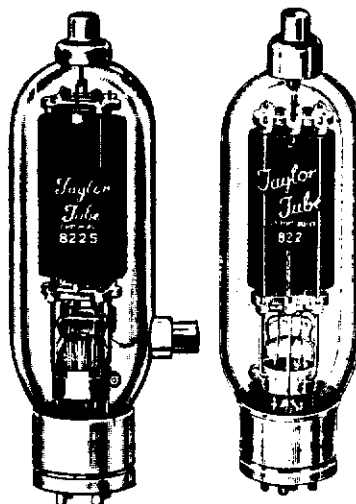

822 - 822S

\$18.50 \$21.50

GENERAL PURPOSE TRIODE
200 WATTS PLATE DISSIPATION

The 822 and 822S are unusually efficient and rugged Tubes especially designed for peak performance in all R F services, 822 up to 20 mc; 822S up to 30 mc; and in Class B Audio. These tubes are widely used in Induction Heating and Diathermy apparatus where long-life under abusive conditions demands a tube that "can take it." The 822S is exactly the same as the 822 except that the grid lead comes out through the side of the bulb, thus affording increased safety of operation on higher frequencies.

CLASS C TELEGRAPHY
Maximum Ratings

D. C. Plate Volts	2500
D. C. Plate Current, ma.....	300
D. C. Grid Current, ma.....	60
D. C. Grid Volts	400
Plate Dissipation, watts.....	200

Typical Operating Conditions

D. C. Plate Volts.....	2000	2500
D. C. Plate Current, ma.....	300	300
D. C. Grid Current, ma.....	51	51
D. C. Grid Bias Volts.....	-136	-190
From Grid Leak of, ohms.....	2670	3730
Or { Fixed Supply of, volts.....	-75	-100
From { Plus Grid Leak of, ohms.....	1200	1765
Plate Dissipation, watts.....	140	150
Power Output, watts.....	460	600
Driving Power, watts.....	14	17

CLASS C TELEPHONY
Maximum Ratings

D. C. Plate Volts	1000
D. C. Plate Current, ma.....	250
D. C. Grid Current, ma.....	60
D. C. Grid Volts	400
Plate Dissipation, watts.....	135

Typical Operating Conditions

D. C. Plate Volts	1750	2000
D. C. Plate Current, ma.....	250	250
D. C. Grid Current, ma.....	45	43
D. C. Grid Bias Volts.....	151	195
From Grid Leak of, ohms.....	3350	4500
Or { Fixed Supply of, volts.....	-65	-75
From { Plus Grid Leak of, ohms.....	1900	2800
Plate Dissipation, watts.....	92	95
Power Output, watts.....	345	405
Driving Power, watts.....	12.5	13.7

CLASS B AUDIO


Typical Operating Conditions for Two Tubes

D. C. Plate Volts	1500	2000	2500	3000
D. C. Plate Current, ma.....	500	500	500	450
D. C. Grid Bias Volts.....	-35	-45	-67.5	-80
Power Output, watts.....	525	720	900	1000
Driving Power, watts.....	7	7.2	7.4	8
Plate to Plate Load, ohms.....	6800	9500	12000	16000
Peak Grid to Grid Volts.....	286	306	351	362

CLASS B AUDIO DATA

The chart below gives the max. average value as would be indicated on the plate current meter with sine wave input. For the same peak output with voice input the max. average plate current reading will be approximately 50 to 60 per cent of this value.

Supply Voltage ↓	400	500	750	1000	Audio Watts ↑ Output
3000		32000 230 ma. 2.6	21500 340 ma. 4.6	16000 500 ma. 8.0	←Plate to Plate load ←Max. Av. Ip. ←Watts drive
2500		22000 280 ma. 3.5	14500 410 ma. 6.0	10500 560 ma. 8.5	←Plate to Plate load ←Max. Av. Ip. ←Watts drive
2000	16800 285 ma. 3.25	13000 360 ma. 4.8	8800 525 ma. 7.4		←Plate to Plate load ←Max. Av. Ip. ←Watts drive
1500	9000 390 ma. 4.4	7100 500 ma. 6.7			←Plate to Plate load ←Max. Av. Ip. ←Watts drive

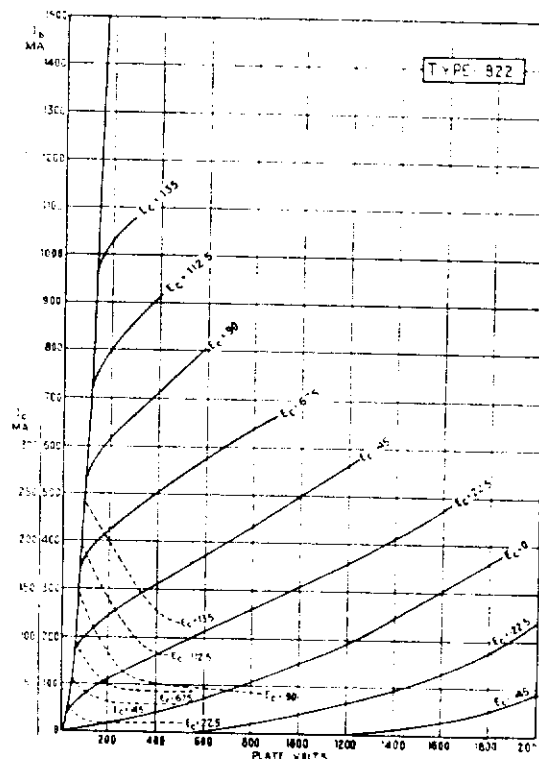

Taylor

CUSTOM
BUILT

Tubes

T-40

GENERAL PURPOSE TRIODE
40 WATTS PLATE DISSIPATION
The Wonder Tubes

\$3.50

260 WATTS Safety Factor

In six years over 200,000 T-40's and TZ-40's were put into operation in Amateur and Commercial Transmitters in nearly every country in the world. They are widely used by the British government. These Wonder Tubes are the most popular medium power Transmitting Tubes ever developed and they unquestionably set a new and higher standard of "Watts per Dollar" in this field. Prior to the advent of the T-40 and TZ-40, the only comparative tube sold for \$10.00, which is further proof that Taylor Tubes is solely responsible for today's outstanding values in Transmitting Tubes.

T-40's and TZ-40's offer you Processed Carbon Anodes together with complete Molybdenum grids, making possible the Safest Tube in their class in their ability to withstand serious temporary overloads. The scientifically designed Thoriated Tungsten filaments insure long life and maximum emission.

TECHNICAL DATA

While the rated plate dissipation of the T-40 and TZ-40 is 40 watts no color shows on the plate until the dissipation amounts to approximately 60 watts and it takes about 90 watts to cause a red spot in the center of the plate. In this catalog it will be noticed that the TZ-40 has been recommended as an R.F. Amplifier. The reason is that due to the Zero Bias characteristics the plate current will drop to a low value when excitation ceases such as in keying of a preceding stage. This eliminates the necessity of a fixed source of bias as would be required by a T-40 under similar conditions. Comparing the T-40 and TZ-40 we note that the T-40 is easier to drive than the TZ-40. However, in most cases the small additional driving power required by the TZ-40 is less objectionable than the fixed source of bias that must be used with the T-40.



GENERAL CHARACTERISTICS

Filament Volts	7.5
Filament Current, amps.....	3.0
Amplification Factor	25
Plate Dissipation, watts.....	40

Interelectrode Capacities

Grid-Plate, mmf.	5.2
Grid-Filament, mmf.	4.9
Plate-Filament, mmf.	1.0

Overall Dimensions

Maximum Length, inches.....	6 1/4
Maximum Diameter, inches.....	2 1/8

UX 4 Prong Base

CLASS C TELEGRAPHY

Maximum Ratings

	C.C.S.	I.C.A.S.
D. C. Plate Volts.....	1250	1500
D. C. Plate Current, ma.....	125	150
D. C. Grid Current, ma.....	40	40
D. C. Grid Volts	250	250
Plate Dissipation, watts.....	40	40*

Typical Operating Conditions

D. C. Plate Volts.....	1250	1500
D. C. Plate Current, ma.....	125	150
D. C. Grid Current, ma.....	25	28
D. C. Grid Bias Volts.....	-110	-140
From Grid Leak of, ohms.....	4400	5000
Or { Fixed Supply of, volts.....	-60	-75
From { Plus Grid Leak of, ohms.....	2000	2300
Plate Dissipation, watts.....	40	67*
Power Output, watts.....	116	158
Driving Power, watts.....	6.5	9

* It is permissible to allow the plate dissipation to approach twice the normal rating in telegraph service where key down condition exists approximately 50 per cent of the time.

CLASS C TELEPHONY


Maximum Ratings

	C.C.S.	I.C.A.S.
D. C. Plate Volts.....	1000	1250
D. C. Plate Current, ma.....	115	125
D. C. Grid Current, ma.....	40	40
D. C. Grid Volts	250	250
Plate Dissipation, watts.....	30	40*

Typical Operating Conditions

D. C. Plate Volts.....	1000	1250
D. C. Plate Current, ma.....	100	115
D. C. Grid Current, ma.....	18	20
D. C. Grid Bias Volts.....	-100	-115
From Grid Leak of, ohms.....	5600	5750
Or { Fixed Supply of, volts.....	50	60
From { Plus Grid Leak of, ohms.....	2800	2750
Plate Dissipation, watts.....	29	40*
Power Output, watts.....	71	104
Driving Power, watts.....	4.2	5.25

* The intermittent nature of voice modulation in amateur telephone transmission permits the use of the maximum plate dissipation ratings.

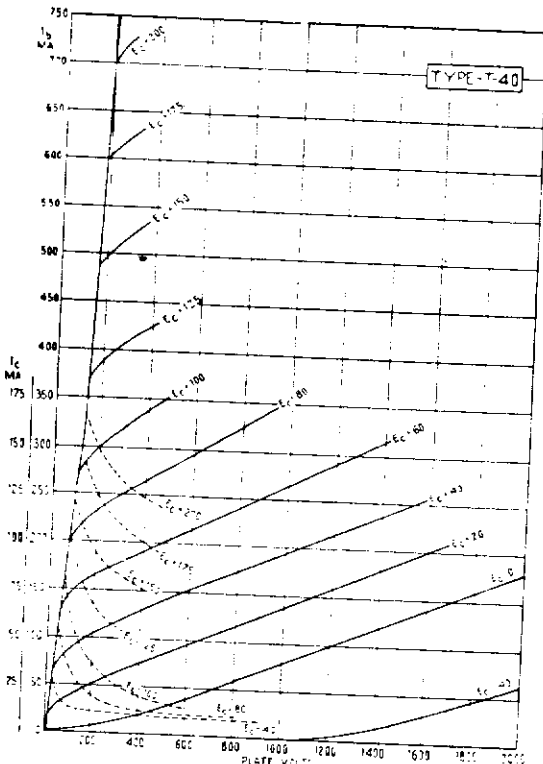

Taylor

CUSTOM
BUILT

Tubes

TZ-40

ZERO BIAS TRIODE
40 WATTS PLATE DISSIPATION
The Wonder Tubes


\$3.50

**DELIVER 250 WATTS CLASS B AUDIO
OUTPUT**
THE IDEAL DOUBLER TUBE

CLASS B AUDIO DATA

In the chart below, the current value is the maximum average value as would be indicated on the plate current meter with sine wave input. For the same peak output with voice input the maximum average plate current as indicated on meter will be approximately 50 to 60 per cent of this value.

Audio Watts Output	750	1000	1250	1500	Supply Voltage
100	6000 230 ma. 4.0	15500 145 ma. 2.0			←Plate to Plate load ←Max. Av. Ip. ←Watts drive
150		8800 240 ma. 4.4	16000 175 ma. 2.75W		←Plate to Plate load ←Max. Av. Ip. ←Watts drive
175		7350 280 ma. 5.5	14000 200 ma. 3.4	20000 170 2.75	←Plate to Plate load ←Max. Av. Ip. ←Watts drive
225			10000 280 ma. 6.0	16000 215 3.85	←Plate to Plate load ←Max. Av. Ip. ←Watts drive
250				12000 250 ma. 6.0	←Plate to Plate load ←Max. Av. Ip. ←Watts drive

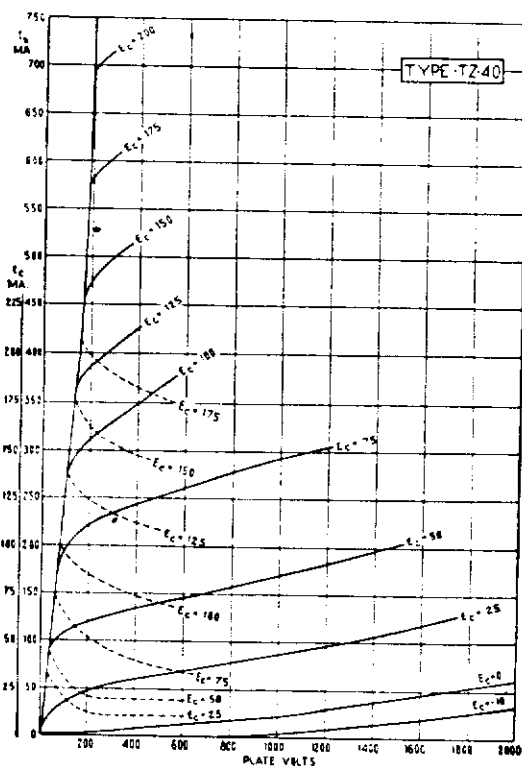

GENERAL CHARACTERISTICS

Filament Volts.....	7.5
Filament Current, amps.....	3.0
Amplification Factor.....	62
Plate Dissipation, watts.....	40

Interelectrode Capacities

Grid-Plate, mmf.....	5.0
Grid-Filament, mmf.....	4.8
Plate-Filament, mmf.....	0.8

Overall Dimensions

Maximum Length, inches.....	6 1/4
Maximum Diameter, inches.....	2 1/4
Alsimag	UX 4 Prong Base

CLASS C TELEGRAPHY, Maximum Ratings

	C.C.S.	I.C.A.S.
D. C. Plate Volts	1250	1500
D. C. Plate Current, ma.....	125	150
D. C. Grid Current, ma.....	45	45
D. C. Grid Volts	250	250
Plate Dissipation, watts.....	40	40*

Typical Operating Conditions

D. C. Plate Volts	1250	1500
D. C. Plate Current, ma.....	125	150
D. C. Grid Current, ma.....	31	38
D. C. Grid Bias Volts	-90	-90
From Grid Leak of, ohms.....	2900	2370
Plate Dissipation, watts.....	40	60*
Power Output, watts.....	116	165
Driving Power, watts.....	7.25	10

* It is permissible to allow the plate dissipation to approach twice the normal rating in telegraph service where key down condition exists approximately 50 per cent of the time.

CLASS C TELEPHONY, Maximum Ratings

	C.C.S.	I.C.A.S.
D. C. Plate Volts	1000	1250
D. C. Plate Current, ma.....	115	125
D. C. Grid Current, ma.....	45	45
D. C. Grid Volts	250	250
Plate Dissipation, watts.....	30	40*

Typical Operating Conditions

D. C. Plate Volts	1000	1250
D. C. Plate Current, ma.....	100	125
D. C. Grid Current, ma.....	26	30
D. C. Grid Bias Volts	-65	-100
From Grid Leak of, ohms.....	2500	3300
Plate Dissipation, watts.....	27	40*
Power Output, watts.....	73	116
Driving Power, watts.....	4.6	7.5

* The intermittent nature of voice modulation in amateur transmission permits the use of the maximum plate dissipation rating.

CLASS B AUDIO

Typical Operation Conditions for Two Tubes

	C.C.S.	I.C.A.S.
D. C. Plate Volts	1250 1000	1500 1250
D. C. Plate Current, ma.....	240 200	250 280
D. C. Grid Bias Volts.....	-4.5 0	-9 -4.5
Power Output, watts.....	200 130	250 225*
Driving Power, watts.....	4.5 2.8	6 6
Plate to Plate Load, ohms.....	11000 11000	12000 10000
Peak Grid to Grid Volts.....	242 200	265 269

* The intermittent nature and low average power in a voice wave permits use of higher peak power output without overloading the tubes. Power outputs listed are for sine wave voltage and are intended for use in calculating modulating capabilities. Actually the power output is much less with voice input.


Taylor

CUSTOM
BUILT

Tubes

R-F POWER AMPLIFIER AND OSCILLATOR, CLASS C

	C.C.S.	I.C.A.S.
Plate Volts, D. C., max.....	2000	2250
Plate Current, D. C., milliamperes, max....	250	275
Plate Input, watts, max.....	500	620
Plate Dissipation, watts, max.....	125	150
Plate Volts & Input Max. % for 30 MC, %	100	100
Plate Volts & Input Max. % for 60 MC, %	70	70
Plate Volts & Input Max. % for 100 MC, %	50	50
Grid Volts, D. C., max.....	-500	-500
Grid Current, D. C., milliamperes, max....	70	70

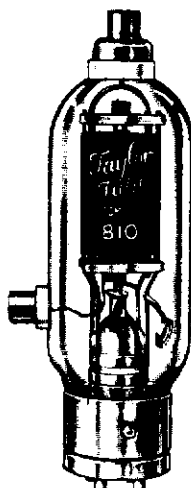

810

AMPLIFIER AND OSCILLATOR TRIODE

125 WATTS PLATE DISSIPATION

\$13.50

The Taylor 810 is a general purpose Triode rated for full input on frequencies up to 30 MC, and at 50% up to 100 MC. The 810 design incorporates features that insure long, safe operation in Transmitters, Diathermy equipment and Induction Heating Apparatus.

TYPICAL OPERATION


Plate Volts, D. C.	1500	2000	2250
Plate Current, D. C., milliamperes.....	250	250	275
Grid Volts, D. C.	-120	-160	-160
From Cathode Resistor, ohms.....	415	550	510
From Grid Resistor, ohms.....	3000	4000	4000
Grid Volts, Peak R-F.....	280	330	330
Grid Current, D. C., ma.....	40	40	40
Driving Power, watts.....	10	12	12
Power Output, watts.....	275	375	475

A-F POWER AMPLIFIER AND MODULATOR, CLASS B

TYPICAL OPERATION

Unless Otherwise Specified, Values Are for 2 Tubes

Plate Volts, D. C.	1500	2000	2250
Plate Current, Zero-Sig. D. C., ma.....	80	60	70
Plate Current, Max-Sig. D. C., ma.....	500	420	450
Grid Volts, D. C.	-30	-50	-60
Grid-to-Grid Volts, Peak A-F.....	345	345	880
Load Resistor, ohms (per tube).....	1650	2750	2900
Effective Load Resistor, ohms (pl-pl).....	6600	11000	11600
Max-Sig. Drive, watts	12	10	13
Max-Sig. Power Output, watts.....	510	590	725

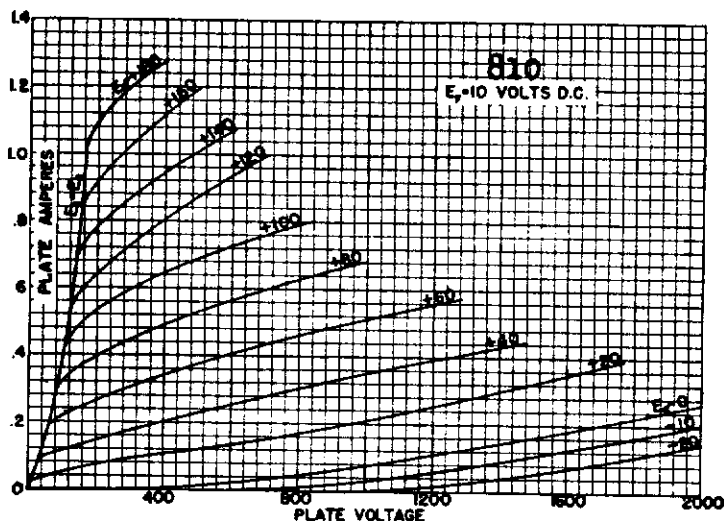

GENERAL CHARACTERISTICS

Filament Voltage, volts.....	10.0
Filament Current, amps.	4.5
Amplification Factor	36
Capacitance, Grid-Plate, uuf.....	4.8
Capacitance, Grid-Filament, uuf.....	8.7
Capacitance, Plate-Filament, uuf.....	12

PLATE-MODULATED R-F POWER AMPLIFIER, CLASS C

	C.C.S.	I.C.A.S.
Plate Volts, D. C., max.....	1600	1800
Plate Current, D. C., milliamperes, max.....	210	250
Plate Input, watts, max.....	335	450
Plate Dissipation, watts, max.....	85	125
Plate Volts and Input Max. % for 30 MC, %.....	100	100
Plate Volts and Input Max. % for 60 MC, %.....	70	70
Plate Volts and Input Max. % for 100 MC, %.....	50	50
Grid Volts, D. C., max.....	-500	-500
Grid Current, D. C., milliamperes, max.....	70	70

TYPICAL OPERATION

Plate Volts, D. C.	1250	1600	1800
Plate Current, D. C., milliamperes.....	210	210	250
Grid Volts, D. C.....	-200	-200	-200
From Grid Resistor, ohms.....	4000	4000	4000
Grid Volts, Peak R-F.....	370	370	370
Grid Current, D. C., milliamperes.....	50	50	50
Driving Power, watts.....	17	17	17
Power Output, watts.....	180	250	335

Taylor

CUSTOM
BUILT

Tubes

T-125

WITH ACCELERATING FINs
125 WATTS PLATE DISSIPATION
TRIODE

\$13.50


TAYLOR T-124

Identical specifications and characteristics as the T-125 except the amp. factor is 48.

The T125 is the tube amateurs demanded to fill the gap between the T55 and T200. It's a mansized tube at low cost and it features a new TAYLOR invention (patent applied for) making possible high efficiency at low plate voltages and with low inter-electrode capacities. Rated conservatively, one tube will handle a full 500 watts input at the maximum ratings of 2000 volts, 250MA. The interelectrode capacities are low, making possible efficient operation on even the highest amateur frequencies—but the use of accelerating fins increases the inherent efficiency of the tube, making it far more efficient than others with comparative interelectrode capacities. These fins projecting inward toward the grid and filament effectively produce the very desirable characteristics of higher C tubes without greatly increasing the capacities. Thus this tube is truly unique in that it possesses the advantages of a low C tube together with the advantages of a higher C tube—without the disadvantages of either. It is truly a remarkable tube and is a revolutionary step forward in tube design.

At the rated plate dissipation of 125 watts the carbon plate shows no color but the accelerating fins operate at a bright orange color. If the type of operation or input are not such as to result in excessive dissipation, color showing on the plate may be taken as a definite indication that the circuit is less efficient than it should be.

For some time there has been a need for a high frequency tube to replace tubes of the 203A type with the absolute minimum of changes in the transmitter. The T125 fills the needs in a most satisfactory manner. Because of the exclusive TAYLOR Accelerating Fins construction, efficiencies on the order of those obtained with 03A's are possible at the same plate voltages and with the same low grid drive requirements. In addition the plate dissipation is greater than that of an 03A and the plate current rating greater making it possible to increase the power at the same Plate voltage as well as gaining the advantages of low C tube operation at the higher frequencies. In order to replace an 03A type of tube with the T125 it will be necessary only to change the grid and plate connections and to re-neutralize. If the minimum capacity of the neutralizing condenser is too high, plates may be removed. No circuit or bias changes are necessary because the Mu of the T125 is the same as that of an 03A.

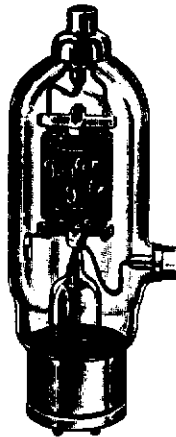

GENERAL CHARACTERISTICS

Filament Volts	10
Filament Current, amps	4.5
Plate Dissipation, watts	125
Amp. Factor	25

Overall Dimensions

Max. Length, Inches	8 1/4
Max. Diameter, Inches	3

Interelectrode Capacities

Grid-Plate, mmf	6.0
Grid-Filament, mmf	6.3
Plate-Filament, mmf	2.6
Nonex Glass	50 watt base

CLASS C TELEGRAPHY

Maximum Ratings

	C.C.S.	I.C.A.S.
D. C. Plate Volts	2000	2500
D. C. Plate Current	250	250
D. C. Grid Current	70	70
D. C. Grid Volts	—500	—500
Plate Dissipation, watts	125	125#

Typical Operating Conditions

	C.C.S.	I.C.A.S.
D. C. Plate Volts	1500 2000	2000 2500
D. C. Plate Current	250 250	250 250
D. C. Grid Current	35 34	34 35
D. C. Grid Bias Volts	—125 —150	—150 —200
From Grid leak of, ohms	3600 4300	4300 5700
Plate Dissipation, watts	99 118	118 125#
Driving Power, watts	10 10	10 12.5
Peak AC Grid Volts	315 335	335 400

It is permissible to allow the plate dissipation to approach twice this value in telegraph service where key down condition exists approximately half the time.

CLASS C TELEPHONY


Maximum Ratings

	C.C.S.	I.C.A.S.
D. C. Plate Volts	1750	2000
D. C. Plate Current	210	250
D. C. Grid Current	70	70
D. C. Grid Volts	—500	—500
Plate Dissipation, watts	85	125

Typical Operation Conditions

	C.C.S.	I.C.A.S.
D. C. Plate Volts	1500 1750	1500 2000
D. C. Plate Current	200 200	250 250
D. C. Grid Current	30 30	35 35
D. C. Grid Bias Volts	—150 —175	—165 —165
From Grid leak of, ohms	5000 5800	4700 4700
Or { Fixed Supply of, volts	—60 —70	—60 —80
From { Plus Grid Leak of, ohms	3000 3500	3000 2500
Plate Dissipation, watts	70 78	94 120*
Driving Power, watts	8 9.5	11 12
Peak AC Grid Volts	315 345	360 380

* The intermittent nature of voice modulation permits the use of the full plate dissipation rating of the tube.

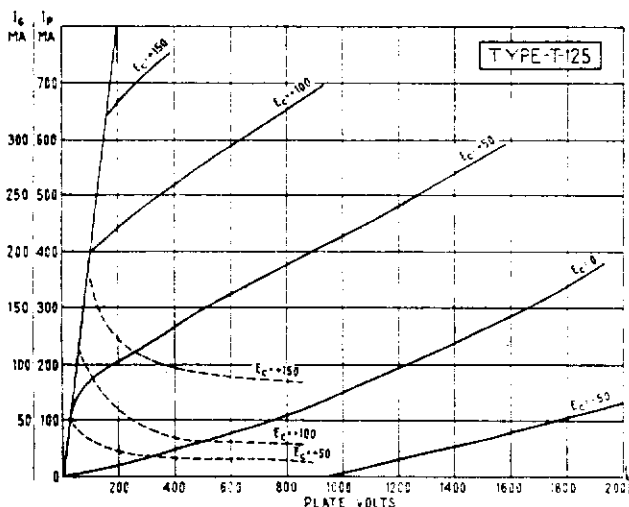

Taylor

CUSTOM
BUILT

Tubes

T-200

200 WATTS PLATE DISSIPATION
TRIODE

\$21.50

57.5 WATT FILAMENT

The T-200 has often been called "The Amateur's Power House Tube." A pair of these tubes push-pull will loaf along at 1 kw input on any frequency from 30 to 1.7MC. This tube uses the efficient flat form of construction and the inter-electrode capacities represent the best possible combination of inter-electrode capacities and other characteristics for best efficiency at moderate plate voltages with minimum grid drive requirements. The inter-electrode capacities are low enough for ease of neutralization yet are not so low that the characteristics of the tube are adversely affected. Many amateurs prefer a tube that will deliver good efficiency at high current and relatively low plate voltage and the T-200 is the answer. A plate modulated input of 450 watts with only 18 watts drive at 1500 volts is just what many have been thinking about and we recommend the T-200 highly under these conditions. A large percentage of high-powered transmitters on 75 and 160 meters use T-200's with great success.

The T200 is widely used in Diathermy equipment. This type of service is particularly hard on Tubes and the general acceptance of the T200 by many leading manufacturers of Diathermy equipment is convincing proof of the T200's rugged construction and conservative rating. Do not confuse the T200 with smaller tubes bearing the same type number.

T-200 POPULARITY

Some of the leading Diathermy and Induction Heating apparatus manufacturers use the Taylor T-200. Long, trouble-free operation is the factor that makes the Taylor T-200 the standard of comparison in its class.



GENERAL CHARACTERISTICS

Filament Volts	10.0
Filament Current, amps	5.75
Amplification Factor	17
Plate Dissipation, watts	200

Interelectrode Capacities

Grid-Plate, mmf.	7.9
Grid-Filament, mmf.	9.5
Plate-Filament, mmf.	1.6

Overall Dimensions

Maximum Diameter, inches	9 1/4
Maximum Length, inches	3 3/4
50 Watt Base	Nonex Glass

CLASS C TELEGRAPHY Maximum Ratings

D. C. Plate Volts	2500
D. C. Plate Current, ma	350
D. C. Grid Current, ma	60
D. C. Grid Volts	400
Plate Dissipation, watts	200

Typical Operating Conditions


D. C. Plate Volts	2000	2500
D. C. Current, ma	350	300
D. C. Grid Current, ma	56	48
D. C. Grid Bias Volts	-205	-265
From Grid Leak of, ohms	3640	5500
Or { Fixed Supply of, volts	120	150
From { Plus Grid Leak of, ohms	1500	2400
Plate Dissipation, watts	178	160
Power Output, watts	522	590
Driving Power, watts	21.7	20

CLASS C TELEPHONY Maximum Ratings

D. C. Plate Volts	2000
D. C. Plate Current, ma	300
D. C. Grid Current, ma	60
D. C. Grid Volts	400
Plate Dissipation, watts	140

Typical Operating Conditions

D. C. Plate Volts	1500	2000
D. C. Plate Current, ma	300	250
D. C. Grid Current, ma	50	41
D. C. Grid Bias Volts	-205	-220
From Grid Leak of, ohms	4100	5400
Or { Fixed Supply of, volts	100	125
From { Plus Grid Leak of, ohms	2100	2300
Plate Dissipation, watts	117	110
Power Output, watts	333	390
Driving Power, watts	18.7	15

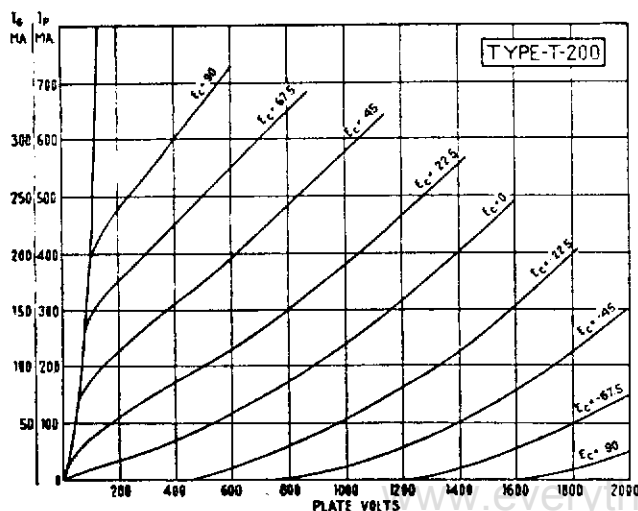

Taylor

CUSTOM
BUILT

Tubes

805

125 WATTS PLATE DISSIPATION
CARBON ANODE

\$11.00

ZERO BIAS
UP TO 510 WATTS
CLASS B AUDIO OUTPUT


The 805 is a high mu zero bias tube of popular type incorporating the use of the famous heat tested Speer processed carbon anodes together with the Taylor Floating anode type of construction. The plate lead is brought out the top greatly minimizing the chances of voltage breakdowns.

The no-signal or static plate current is about 55MA per tube at 1250 volts (zero bias) and about 30MA per tube at 1500 volts when 15 bias volts are added. Because the 805 is a zero bias tube, or practically so, grid current flows during nearly all of the input cycle. Due to this, the input transformer design requirements are less involved and excellent frequency response with minimum distortion is easily realized. The maximum average grid driving power is approximately 8 watts. Low impedance triodes such as 2A3's or 6A3's should be used in the driver stage.

805 CLASS B AUDIO DATA

Supply Voltage ↓	275	325	400	450	Audio Watts Output
1750		270MA 15,000 4.5	330MA 12,000 6.0	390MA 10,000 9.0	←Max. Av. Ip ←Plate to Plate Load ←Watts Drive
1500	276MA 12,000 5.0	330MA 10,000 7.0	420MA 8,000 9.5	420MA 9,350 10.0	←Max. Av. Ip ←Plate to Plate Load ←Watts Drive
1250	335MA 8,000 6.25	395MA 6,800 8.5	←Max. Av. Ip ←Plate to Plate Load ←Watts Drive		

The chart above gives proper Class B Audio operating conditions for various outputs at different plate voltages. The most important value is the reflected load impedance which is given for the entire primary or plate to plate. The current value is the maximum average value as would be indicated on the plate current meter with sine wave input. For the same peak output with voice input the maximum average plate current will be approximately 50% to 60% of this value.

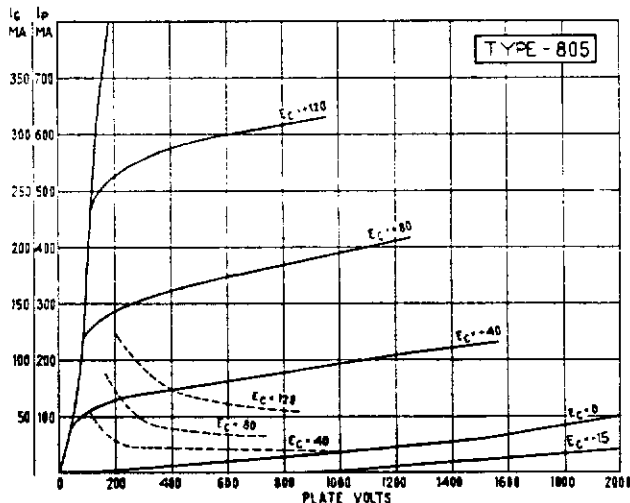

GENERAL CHARACTERISTICS

Filament Volts	10
Filament Current, amps.....	3.25
Amplification Factor, approx.....	45
Plate Dissipation, watts.....	125

Interelectrode Capacities

Grid-plate, mmf.	6.3
Grid-filament, mmf.	8.4
Plate-filament, mmf.	7.0

Overall Dimensions

Maximum length, inches.....	8 1/2
Maximum diameter, inches.....	2 1/8
50 Watt Base	Nonex Glass

CLASS C TELEGRAPHY
Maximum Ratings

D. C. Plate Volts.....	1750
D. C. Plate Current, ma.....	210
D. C. Grid Current, ma.....	70
D. C. Grid Volts.....	500
Plate Dissipation, watts.....	125

Typical Operating Conditions

D. C. Plate Volts.....	1000	1500	1750
D. C. Plate Current, ma.....	200	200	200
D. C. Grid Current, ma.....	45	45	44
D. C. Grid Bias Volts.....	-75	-85	-90
From grid leak of, ohms.....	1650	1880	2000
Or { Fixed Supply of, volts.....	-30	-50	-60
From { Plus Grid Leak of, ohms.....	1000	780	700
Plate Dissipation, watts.....	56	72	80
Power Output, watts.....	144	228	270
Driving Power, watts.....	8.7	9	9.2

CLASS C TELEPHONY
Maximum Ratings

D. C. Plate Volts.....	1500
D. C. Plate Current, ma.....	175
D. C. Grid Current, ma.....	70
D. C. Grid Volts.....	500
Plate Dissipation, watts.....	85

Typical Operating Conditions


D. C. Plate Volts.....	1000	1500
D. C. Plate Current, ma.....	175	175
D. C. Grid Current, ma.....	45	40
D. C. Grid Bias Volts.....	-100	-140
From grid leak of, ohms.....	2200	3500
Or { Fixed Supply of, volts.....	-30	-50
From { Plus Grid Leak of, ohms.....	1500	2250
Plate Dissipation, watts.....	50	55
Power Output, watts.....	125	208
Driving Power, watts.....	10.0	10.5

CLASS B AUDIO

Typical Operating Conditions For Two Tubes

D. C. Plate Volts.....	1250	1500	1750
D. C. Plate Current, ma.....	400	420	420
D. C. Grid Bias Volts.....	0	-15	-22.5
Power Output, watts.....	325	400	510
Driving Power, watts.....	8.5	9.5	10
Plate to Plate load, ohms.....	6700	7850	9350
Peak Grid to Grid Volts.....	268	306	320

www.everything4lessstore.com

**203-A**

100 WATTS PLATE DISSIPATION
OSCILLATOR AND AMPLIFIER
TRIODE

\$10.00

GENERAL CHARACTERISTICS

Fil. Volts	10
Fil. Current, amps.....	3.25
Amp. Factor	25
Nonex Glass	50 Watt Base

OVERALL DIMENSIONS

Maximum Length, inches.....	7½
Maximum Diameter, inches.....	2⅞

INTERELECTRODE CAPACITIES


Plate to Grid, mmf.....	14
Grid to Filament, mmf.....	8
Plate to Filament, mmf.....	7

R-F POWER AMPLIFIER AND OSCILLATOR—CLASS C
MAXIMUM RATINGS

D. C. Plate Volts	1250
D. C. Plate Current, ma.....	175
D. C. Grid Current, ma.....	60
D. C. Grid Volts	—400

TYPICAL OPERATING CONDITIONS

D. C. Plate Volts	1250
D. C. Plate Current, ma.....	175
D. C. Grid Current, ma.....	25
D. C. Grid Bias Volts.....	—125
From Grid Resistor, ohms.....	5000
From Cathode Resistor, ohms.....	725
Driving Power, watts.....	7
Power Output, watts.....	150
Full Input to 15 mc.....	.75% to 30 mc.

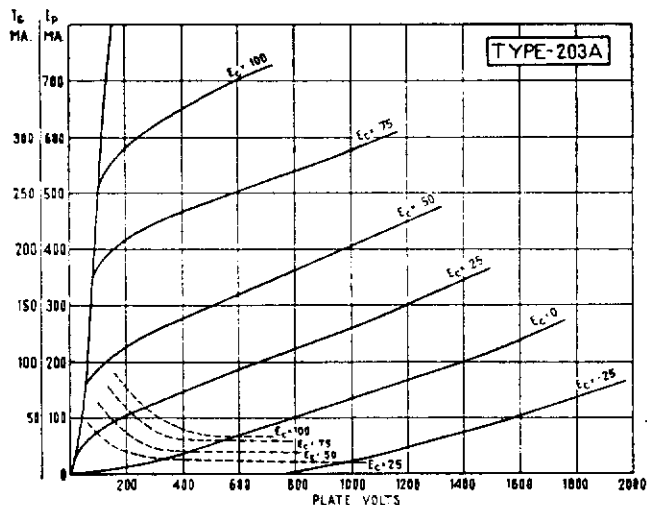**211-211-D**

100 WATTS PLATE DISSIPATION
OSCILLATOR AND AMPLIFIER
TRIODE

\$10.00

GENERAL CHARACTERISTICS

Fil. Volts	10
Fil. Current, amps.....	3.25
Amp. Factor	25
Nonex Glass	50 Watt Base

OVERALL DIMENSIONS

Maximum Length, inches.....	7½
Maximum Diameter, inches.....	2⅞

INTERELECTRODE CAPACITIES


Plate to Grid, mmf.....	14
Grid to Filament, mmf.....	7
Plate to Filament, mmf.....	6

R-F POWER AMPLIFIER AND OSCILLATOR—CLASS C
MAXIMUM RATINGS

D. C. Plate Volts	1250
D. C. Plate Current, ma.....	175
D. C. Grid Current, ma.....	60
D. C. Grid Volts	—400

TYPICAL OPERATING CONDITIONS

D. C. Plate Volts	1250
D. C. Plate Current, ma.....	175
D. C. Grid Current, ma.....	35
D. C. Grid Bias Volts	—260
From Grid Resistor, ohms.....	7500
Driving Power, watts.....	7
Power Output, watts.....	150
Full Input to 15 mc.....	.75% to 30 mc.

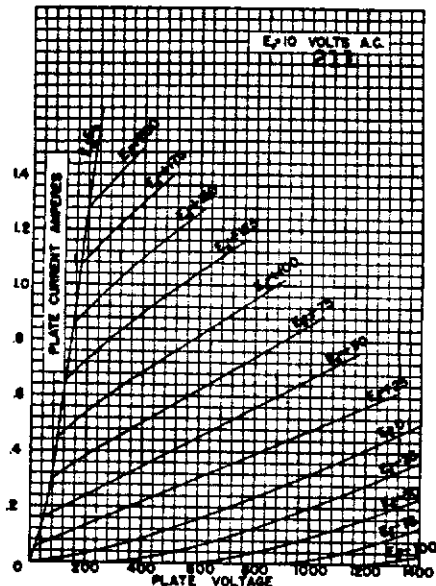

Taylor

CUSTOM
BUILT

Tubes



211-C

EXACT REPLACEMENT FOR W.E.261-A

100 WATTS PLATE DISSIPATION

CARBON ANODE

LOW INTERELECTRODE CAPACITIES

\$12.50

GENERAL CHARACTERISTICS

Type 211-C

Filament Voltage, volts.....	10
Filament Current, amps.....	3.25
Plate Resistance, ohms.....	2800
Mutual Conductance, uMhos.....	4500
Amplification Factor.....	12.5
Nonex Glass	50 Watt Base

OVERALL DIMENSIONS

Maximum Length, inches.....	7½
Maximum Diameter, inches.....	2½

INTERELECTRODE CAPACITIES


Plate to Grid, mmf.....	9
Grid to Filament, mmf.....	6
Plate to Filament.....	6.5

R F POWER AMP. AND OSC-CLASS C MAXIMUM RATINGS

D. C. Plate Volts	1250
D. C. Plate Current, ma.....	175
D. C. Grid Current, ma.....	60
D. C. Grid Volts	-400

TYPICAL OPERATING CONDITIONS

D. C. Plate Volts	1250
D. C. Plate Current, ma.....	175
D. C. Grid Current, ma.....	38
D. C. Grid Bias, volts	-260
From Grid Resistor, ohms.....	7500
Driving Power, watts.....	8
Power Output, watts.....	150
Full input to 20 mc.....	80% to 30 mc

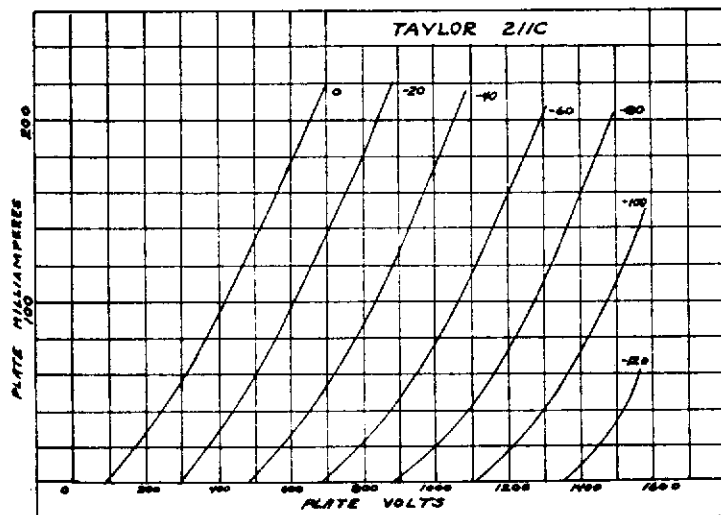

845

EXACT REPLACEMENT FOR W.E.284-A

100 WATTS PLATE DISSIPATION

\$10.00

CLASS "A" AUDIO TUBE

GENERAL CHARACTERISTICS TYPE 845


Filament Voltage.....	10
Filament Current, amps.....	3.25
Mutual Conductance, uMhos.....	3000
Amplification Factor.....	5
Maximum Length.....	7½
Maximum Diameter.....	2½
Plate to Grid, mmf.....	14
Grid to Filament, mmf.....	6.5
Plate to Filament.....	6
Nonex Glass	50 Watt Base

CLASS A-A-F POWER AMP. AND MOD., TYPICAL OPERATING CONDITIONS

Plate Volts, D-C	750	1000	1250
Plate Current, D-C, milliamperes.....	95	90	80
Plate Resistance, ohms	1700	1700	1700
Grid Volts, D-C	-98	-145	-195
From Cathode Resistor of (ohms).....	1030	1610	2435
Grid Swing, Peak A-F, volts.....	93	140	190
Transconductance, uMhos	3100	3100	3100
Load Resistance, ohms	3400	6000	11000
Undistorted Power Output, watts.....	15	24	30

A-F POWER AMP. AND MOD., CLASS AB Unless Otherwise Specified, Values Are for 2 Tubes

Plate Volts, D-C.....	1000	1250
Plate Current, Zero-Signal, D-C, ma.....	40	40
Plate Current, Max. Signal, D-C, ma.....	230	240
Grid Volts, D-C	-175	-225
Grid-to-Grid, Peak A-F, volts.....	340	440
Load Resistance, ohms (per tube).....	1150	1650
Load Resistance, Effective, ohms (plate to plate).....	4600	6600
Max-Signal Power Output, watts.....	75	115

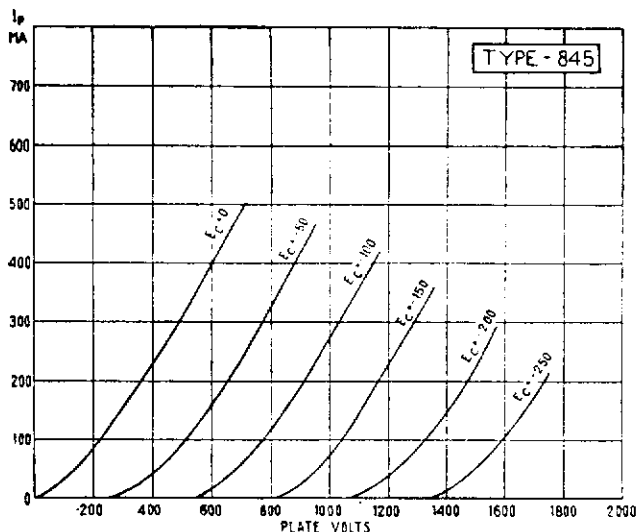

Taylor

CUSTOM
BUILT

Tubes




T-21

21 WATTS

PLATE DISSIPATION
BEAM TUBE

\$1.95



T-21

Bottom View

The T-21 is a heater cathode type Beam Power Amplifier Tube especially efficient as an oscillator, amplifier or frequency multiplier and desirable for mobile and portable radio transmitters. The electrical characteristics are similar to those of the 6L6G.

GENERAL CHARACTERISTICS

Heater Voltage, volts.....	6.3
Heater Current, amps.....	0.9
Amp. Factor.....	138
Max. Plate Dissipation, watts.....	21
Max. Screen Dissipation, watts.....	3.5

Overall Dimensions

Max. Length, inches.....	5 3/4
Max. Diameter, inches.....	2 1/8


Interelectrode Capacities

Grids to Plate, mmf.....	1.4
Input, mmf.....	11.5
Output, mmf.....	11.5

CLASS C AMPLIFIER

Max. Operating Plate, volts.....	400*
Max. D. C. Plate Current—Telegraph, ma.....	95
Max. D. C. Plate Current—Telephone, ma.....	65
Max. D. C. Grid Current, ma.....	5
D. C. Grid, volts.....	45
Max. Driving Power, watts.....	4
Max. Screen Current, ma.....	16
Max. Screen Voltage.....	300

* It is recommended that plate voltage be reduced to 300 volts at frequencies above 30 MC.

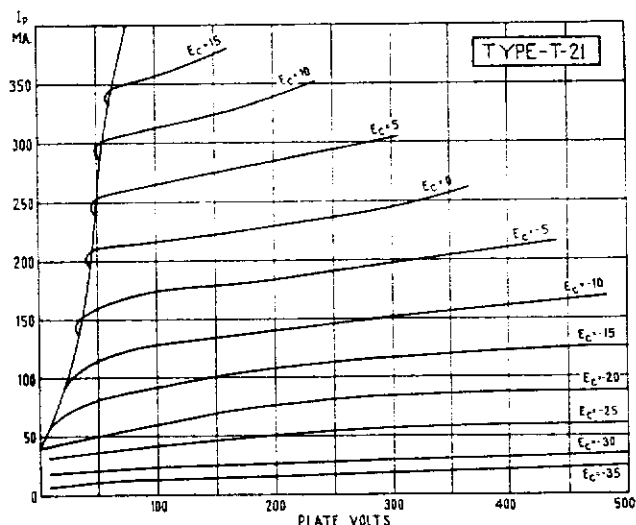


282-A

75 WATTS PLATE DISSIPATION

SCREEN GRID

\$22.50



A Taylor designed Screen Grid, R F Power Amplifier and Oscillator Tube which is used in multi-channel Transmitters. The Taylor design features an improved vertical filament—eliminating the sagging that prevailed with the old spiral wound filament. Taylor 282A is used by all the leading airlines.

GENERAL CHARACTERISTICS

Fil. Volts	1070
Fil. Current, amps.....	3.0
Max. D. C. Plate Volts.....	1000
Max. D. C. Plate Current, ma.....	100
Max. D. C. R. F. Grid Current, amps.....	5
Max. D. C. Screen Grid Volts.....	150
Max. D. C. Grid Volts.....	90
Amp. Factor	100
Max. Size.....	6 3/4 in. high, 2 1/4 diameter
UX 4 Prong Base	Nonex Glass

IMPORTANT INFORMATION

TESTING TUBES: As many of the tubes returned to us as defective test out OK here we want to make some suggestions that will enable every user to give doubtful tubes a partial emission test in his own transmitter. Most users have or can easily obtain a 6.3 volt or 10 volt transformer. In the case of testing a tube which has a 7.5 volt filament, replace the 7.5 volt transformer with a 6.3 volt transformer. Then, without making any other changes, note the readings of the meters in the grid and plate circuits of the tube being tested. There should be only a slight drop in the plate current while the grid current may drop to 1/2 its former value and the tube would still be satisfactory condition. Should the grid current drop in excess of 1/2 the original value the filament emission can be considered as below normal and the tube should be returned to us for inspection.

In the case of 10 volt tubes when the filament voltage is dropped to 7.5 volts by substituting transformer, the grid current can be expected to drop to approximately 1/2 the normal value. Should the grid current drop in excess of 1/4 the original reading the tube can be considered as having low filament emission.



The above information is based on tubes being operated as class C amplifiers with the normal rated plate current flowing. Should a tube become defective for reasons other than filament emission such as glass failure or element lead wires damage the cause should be determined before replacing with a new tube. Glass failure in the case of tube with both grid and filament leads brought out through one press is usually caused by: excessive grid voltage, excessive R.F. grid current or approaching the upper frequency limit of practical operation without reducing the power input. In the case of plate leads the glass may be cracked from excessive R.F. current. The R.F. current in the plate lead increases directly with frequency and is particularly destructive in cases where V.H.F. parasitic oscillation are present.

Experience has proven to us that transmitting tubes can not be shipped via Parcel Post with safety. When tubes are returned for inspection pack the tubes very carefully and ship via Express.

CIRCUIT INFORMATION

A circuit employing the 813 in plate-modulated telephony service is shown on this page. In this circuit it will be noted that the plate-circuit by-pass condenser C_6 is connected to ground in series with screen by-pass C_4 . This arrangement minimizes the by-passing effect of C_6 at high audio frequencies and greatly improves the modulation of the screen voltage. Because the screen impedance of the 813 is about 20000 ohms and the series screen resistor required is 60000 ohms, the capacitance ratio of C_4 to C_6 should be about 3 to 1, as indicated in the legend. For operation at 3.5 Mc and lower frequencies, it may be desirable to increase the values of C_4 and C_6 , keeping their ratio the same.

In Class C telegraph service, where the grid excitation or the cathode circuit of the 813 is to be keyed, it is important that the screen voltage be obtained from a separate, low-voltage source, or from a tap on a bleeder circuit across the plate supply. It should not be obtained through a series resistor as shown in the plate-modulated-telephony circuit. With the series-resistor method, the D. C. screen voltage will rise to the plate potential when the space current is reduced to zero. This voltage, of course, greatly exceeds the maximum screen-voltage rating. When the D. C. screen voltage is limited to approximately 400 volts under key-up conditions, a fixed grid bias of -45 or -50 volts is adequate to reduce the plate current to a safe value; partial fixed bias, therefore, is recommended in C. W. transmitters where the oscillator stage is to be keyed for break-in operation. The remainder of the required grid bias can be conveniently obtained from a grid leak.

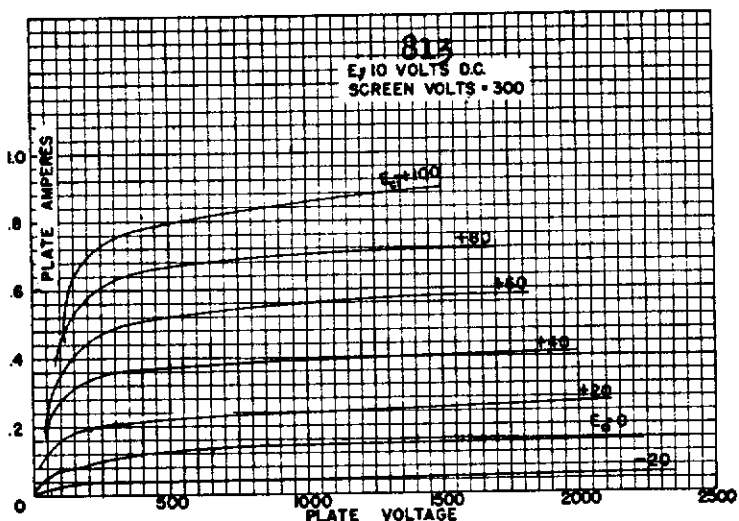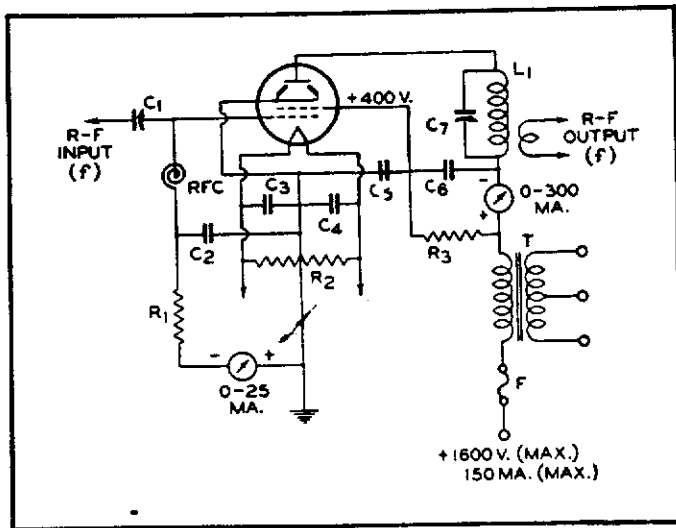

813

BEAM POWER AMPLIFIER

\$22.00

The Taylor 813 is a Beam Power Transmitting Tube requiring less than one watt of driving power to 260 watts output; 100 watts plate dissipation. Ideal for use in quick band-change transmitters, as neutralization is not necessary in well shielded units. The 813 is an excellent doubler—gives strong harmonic output with very high efficiency. Has molded glass-dish type stem. As a result of short leads, the 813 can be operated at full input at 30 mc., and at reduced ratings up to 60 mc.

GENERAL CHARACTERISTICS

Filament Voltage	10.0
Filament Current, amps.	5.0
Transconductance, for Plate Current of 50 ma., approx.	3750

Interelectrode Capacitances:

Grid-Plate (with External Shielding), max., uuf.	0.2
Input, uuf.	16.3
Output, uuf.	14

Max. Height, in. 2 1/8

Max. Diam., in. 7 1/2

7 Prong Jumbo Base

Nonex Glass

MAXIMUM RATINGS AND TYPICAL OPERATING CONDITIONS

As Plate-Modulated R-F Power Amplifier—Class C Telephony

	C.C.S.
D. C. Plate Voltage, max. volts	1600
D. C. Screen Voltage, max. volts	400
D. C. Grid Voltage, max. volts	-300
D. C. Plate Current, max. ma.	150
D. C. Grid Current, max. ma.	25
Screen Input, max. watts	15

Typical Operation:

D. C. Plate Voltage, volts	1250	1600
D. C. Screen Voltage, \$ volts	400	400
From a series screen resistor, ohms	53000	60000
D. C. Grid Voltage, * volts	-120	-130
From a grid resistor of, ohms	30000	21600
Peak R-F Grid Voltage, volts	195	210
Beam-Forming Plate Voltage, ‡ volts	0	0
D. C. Plate Current, ma.	150	150
D. C. Screen Current, ma.	16	20
D. C. Grid Current (approx.), ma.	4	6
Driving power (approx.), watts	0.7	1.2
Power Output (approx.), watts	135	175

As R-F Power Amplifier and Oscillator—Class C Telephony

	C.C.S.
D. C. Plate Voltage, max. volts	2000
D. C. Screen Voltage, max. volts	400
D. C. Grid Voltage, max. volts	-300
D. C. Plate Current, max. ma.	180
D. C. Grid Current, max. ma.	25
Screen Input, max. watts	22

Typical Operation:

D. C. Plate Voltage, volts	1250	1500	2000
D. C. Screen Voltage, volts	300	300	400
From a series resistor of, † ohms	42000	60000	107000
D. C. Grid Voltage, volts	-60	-70	-90
From a grid resistor of, * ohms	8500	11700	30000
Peak R-F Grid Voltage, volts	145	150	160
Beam-Forming Plate Voltage, ‡ volts	0	0	0
D. C. Plate Current, ma.	180	180	185
D. C. Screen Current, ma.	23	20	15
D. C. Grid Current (approx.), ma.	7	6	3
Driving Power (approx.), watts	1	0.8	0.5
Power Output (approx.), watts	155	190	260

†Series screen resistor should not be used except where the 813 is employed as a buffer amplifier and is not keyed.

‡Beam-forming plates should be connected to the mid-point of filament circuit operated on A. C., or to the negative end of the filament when a D. C. filament supply is used.

\$Supplied preferably from separate modulated screen-voltage source; voltage-dropping resistor in series with modulated plate-voltage supply may be used.

*The total effective grid-circuit resistance should not exceed 30000 ohms.

R-F POWER AMPLIFIER AND OSCILLATOR PENTODE. CLASS C

Key-Down Conditions Per Tube Without Modulations

Plate Volts, D. C.	1250	1500	2000
Plate Current, D. C., milliamperes	160	160	160
Grid Bias, Volts, D. C., or.....	-90	-90	-90
From Cathode Resistor, ohms,			
or	415	415	415
From Grid Resistor, ohms.....	7500	7500	7500
Grid Volts, Peak R-F.....	175	175	175
Grid Current, D. C., milliamperes	12	12	12
Screen Volts, D. C.....	500	500	500
Screen Current, D. C., milliamperes.....	45	45	45
Screen Resistor.....	Not Recommended		
Suppressor Volts, D. C.....	40	40	40
Driving Power, watts.....	2	2	2
Power Output, watts.....	130	160	210

R-F POWER AMPLIFIER AND OSCILLATOR TETRODE. CLASS C

Grids No. 2 and No. 3 Connected Together

Key-Down Conditions Per Tube Without Modulations

TYPICAL OPERATION

Plate Volts, D. C.	1250	1500	2000
Plate Current, D. C., milliamperes.....	160	160	160
Grid Bias, Volts, D. C., or.....	-90	-90	-90
From Cathode Resistor, ohms.....	445	445	445
From Grid Resistor, ohms.....	3200	3300	3500
Grid Volts, Peak R-F.....	190	190	190
Grid Current, D. C., ma.....	28	27	26
Screen Volts, D. C.....	150	150	150
Screen Current, D. C., milliamperes.....	15	15	15
Screen Resistor.....	Not Recommended		
Driving Current, watts.....	4.6	4.4	4.4
Power Output, watts.....	130	160	210

NOTES

*Grid Voltages are given with respect to the mid-point of filament operated on A. C.; if D. C. is used, each stated value of grid voltage should be decreased by 7 volts and the circuit returns connected to the negative end of the filament.

†Connected to modulated plate-voltage supply or modulated fixed supply through resistor.

‡Preferably connected to unmodulated plate-voltage supply through resistor.

§Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.



803

PENTODE

125 WATT PLATE DISSIPATION

\$25.00

GENERAL CHARACTERISTICS

Filament Voltage, volts.....	10
Filament Current, amps.....	5
Transconductance, I_p of 62.5 Ma., umhos.....	4000
Capacitance, Grid-Plate (with external shielding), max. uuf.....	0.15
Capacitance, Input, uuf.....	17.5
Capacitance, Output, uuf.....	29

SUPPRESSOR-MODULATED R-F POWER AMPLIFIER PENTODE. CLASS C

Carrier Conditions Per Tube for Use With a Maximum Modulation Factor of 1.0

TYPICAL OPERATION

Plate Volts, D. C.	1250	1500	2000
Plate Current, D. C., milliamperes.....	100	100	80
Grid Bias, Volts, D. C., or.....	-110	-100	-100
From Grid Resistor, ohms.....	5000	5000	7000
Grid Volts, Peak R-F.....	200	190	170
Grid Current, D. C., milliamperes.....	22	20	15
Screen Resistor, ohms.....	13000	17000	35000
Screen Current, D. C., milliamperes.....	70	70	48
Suppressor Volts, D. C.....	-70	-90	-110
Suppressor Volts, Peak A-F.....	110	130	150
Driving Power, watts.....	4	3.5	2.5
Power Output, watts.....	40	50	53

PLATE MODULATED R-F POWER AMPLIFIER PENTODE. CLASS C

Carrier Conditions Per Tube for Use With a Maximum Modulation Factor of 1.0

TYPICAL OPERATION


Plate Volts.....	1250	1600
Plate Current, D. C., milliamperes.....	150	150
Grid Bias, Volts, D. C., or.....	-80	-80
From Grid Resistor, ohms.....	4000	4000
Grid Volts, Peak R-F.....	180	180
Grid Current, D. C., milliamperes.....	20	20
Screen Volts, D. C., or.....	400	500
Screen Resistor, ohms.....	16000	20000
Screen Current, D. C., milliamperes.....	55	55
Suppressor Volts, D. C.....	100	100
Driving Power, watts.....	4	4
Power Output, watts.....	125	155

PLATE MODULATED R-F POWER AMPLIFIER TETRODE. CLASS C

Grids No. 2 and No. 3 Connected Together Carrier Conditions Per Tube for Use With a Maximum Modulation Factor of 1.0

TYPICAL OPERATION

Plate Volts, D. C.	1250	1600
Plate Current, D. C., milliamperes.....	150	150
Grid Bias Volts, D. C., or.....	-180	-180
From Grid Resistor, ohms.....	4000	4000
Grid Volts, Peak R-F.....	305	320
Grid Current, D. C., milliamperes.....	45	45
Screen Volts, D. C., or.....	130	130
Screen Resistor, ohms.....	15000	20000
Screen Current, D. C., milliamperes.....	75	75
Driving Power, watts.....	15	15
Power Output, watts.....	125	155

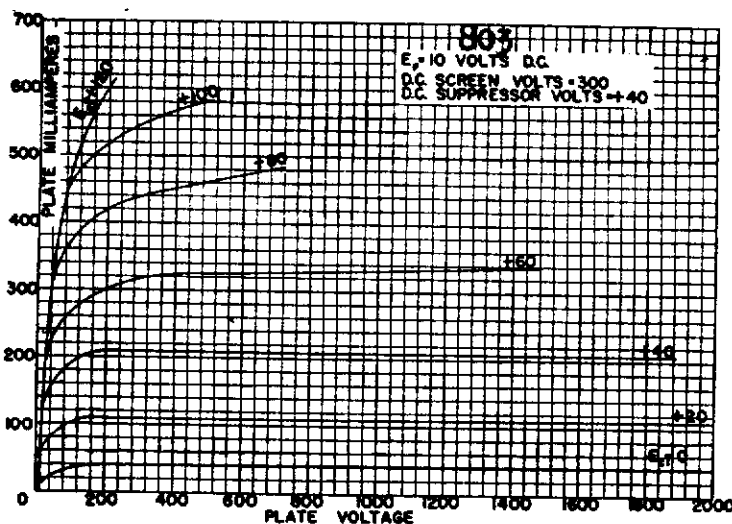

**838**

ZERO BIAS CLASS B MODULATOR
100 WATTS PLATE DISSIPATION

\$10.50

Taylor 838 is a high-mu triode especially designed for zero-bias modulator service. As an R F power Amplifier, the 838 may be used at maximum ratings at frequencies up to 30 mc.

GENERAL CHARACTERISTICS


Filament Voltage (A.C. or D.C.), volts.....	10.0
Filament Current, amps.....	3.25
Direct Interelectrode Capacitances:	
Grid-Plate, uuf.....	8
Grid-Filament, uuf.....	6.5
Plate-Filament, uuf.....	5
MAXIMUM HEIGHT	7 $\frac{7}{8}$ "
MAXIMUM DIAMETER	2 $\frac{1}{8}$ "

TYPICAL OPERATING CONDITIONS

As A-F Power Amplifier and Modulator—Class B

Unless Otherwise Specified, Values Are for 2 Tubes

D-C Plate Voltage, volts.....	1250
D-C Grid Voltage, volts.....	0
Peak A-F Grid-to-Grid Voltage, volts.....	200
Zero-Sig. D-C Plate Current, ma.....	148
Max. Sig. D-C Plate Current, ma.....	320
Load Resistance (per tube), ohms.....	2250
Effective Load Resistance (plate-to-plate), ohms.....	9000
Max. Sig. Driving Power (approx.), watts.....	7.5
Max. Sig. Power Output, watts.....	260

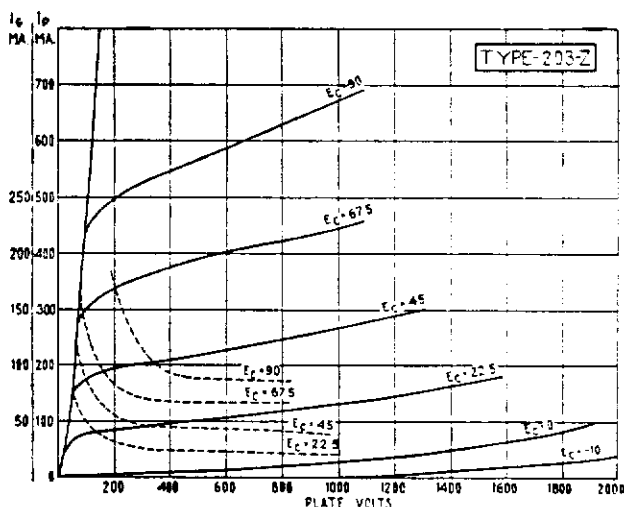**203-Z**

ZERO BIAS TUBE
65 WATTS PLATE DISSIPATION
Nickel Anode

\$8.00**300 WATTS CLASS B OUTPUT****GENERAL CHARACTERISTICS**

Filament Volts	10
Filament Current, amps.....	3.25
Amplification Factor	85
Plate Dissipation, watts.....	65

Overall Dimensions

Maximum Length, inches.....	8 $\frac{1}{4}$
Maximum Diameter, inches.....	2 $\frac{5}{8}$
50 Watt Base	Nonex Glass

CLASS B AUDIO**Maximum Ratings**

D. C. Plate Volts	1250
D. C. Plate Current, ma.....	175
Plate Dissipation, watts.....	65

Typical Operating Conditions for Two Tubes

D. C. Plate Volts	1000	1250
D. C. Plate Current, ma. (max. signal).....	350	350
D. C. Plate Current, ma. (zero signal).....	60	50
D. C. Grid Bias Volts.....	0	-4.5
Power Output, watts.....	230	300
Driving Power, watts.....	6.5	6.75
Peak Grid to Grid, volts.....	206	215
Plate to Plate Load, ohms.....	6200	8000

CLASS B AUDIO DATA

The chart below gives the maximum average value as would be indicated on the plate current meter with sine wave input. For the same peak output with voice input the maximum average plate current will be approximately 50 to 60 per cent of this value.

Supply Voltage ↓	150	200	250	300	Audio Watts ←Output
1250	170 17500 135 2.5	230 12500 165 3.9	300 9500 195 5.6	350 8000 215 6.75	←Max. Av. Ip. ←Plate to Plate load ←Grid to Grid Volts ←Watts drive
1100	200 12700 149 3.1	270 9000 183 5.0	350 7000 215 6.75	←Max. Av. Ip. ←Plate to Plate load ←Grid to Grid Volts ←Watts drive	
1000	220 10000 150 3.4	320 6900 203 6.4	←Max. Av. Ip. ←Plate to Plate load ←Grid to Grid Volts ←Watts drive		
900	250 7900 164 4.1	350 5400 206 6.5	←Max. Av. Ip. ←Plate to Plate load ←Grid to Grid Volts ←Watts drive		

Taylor

CUSTOM
BUILT

Tubes

T-20

GENERAL PURPOSE TRIODE

20 WATTS PLATE DISSIPATION

\$2.25



GENERAL CHARACTERISTICS

Filament Volts	7.5
Filament Current, amps.....	1.75
Amplification Factor	20
Plate Dissipation, watts.....	20

Interelectrode Capacities

Grid-plate, mmf	5.05
Grid-filament, mmf	4.85
Plate-filament, mmf	0.65


Overall Dimensions

Maximum length, inches.....	6
Maximum diameter, inches.....	.24

UX 4-prong Alsimag Base

The T20 is recommended as an extremely fine amplifier tube on all frequencies up to 60 MC. Nearly 30,000 T20's and TZ20's combined have been bought by Amateurs throughout the world and daily we receive enthusiastic reports of long life and highly efficient performance. T20's and TZ20's require a minimum amount of excitation and their ratings are conservative. While the rated plate dissipation is 20 watts, no color shows on the plate until the dissipation amounts to approximately 32 watts and it takes about 45 watts to cause a cherry red spot in the center of the plate.

CAUTION: Taylor T20's and TZ20's have nickel plates and due to the much lower temperature at which this material will melt, they do not have the same high standard of SAFETY FACTOR that is a feature of Taylor Tubes using carbon anodes. The Safety Factor of T20's and TZ20's is approximately 80 watts. This does not mean that they will be any less efficient but it does mean they will not stand as much abuse. The plate voltage should be reduced while making adjustments to prevent excessive heating. Properly handled, the efficiency of these tubes will be as great as though they had carbon anodes and their life will be equally as long.

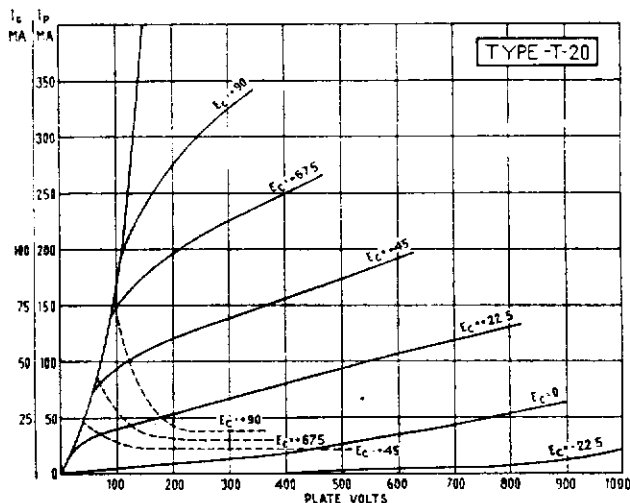

CLASS C TELEGRAPHY

Maximum Ratings

D. C. Plate Volts	750
D. C. Plate Current, ma.....	85
D. C. Grid Current, ma.....	25
D. C. Grid Volts	200
Plate Dissipation, watts.....	20

Typical Operating Conditions

D. C. Plate Volts	750
D. C. Plate Current, ma.....	85
D. C. Grid Current, ma.....	18
D. C. Grid Bias Volts.....	-85
From grid leak of, ohms.....	4722
Or { Fixed supply of, volts.....	40
From { Plus grid leak of, ohms.....	2500
Plate Dissipation, watts.....	20
Power Output, watts.....	44
Driving Power, watts.....	3.6

CLASS C TELEPHONY

Maximum Ratings

D. C. Plate Volts	750
D. C. Plate Current, ma.....	75
D. C. Grid Current, ma.....	25
D. C. Grid Volts	200
Plate Dissipation, watts.....	15

Typical Operating Conditions

D. C. Plate Volts	750
D. C. Plate Current, ma.....	70
D. C. Grid Current, ma.....	15
D. C. Grid Bias Volts.....	-135
From grid leak of, ohms.....	9000
Or { Fixed supply of, volts.....	40
From { Plus grid leak of, ohms.....	6350
Plate Dissipation, watts.....	15
Power Output, watts.....	38
Driving Power, watts.....	3.6

TZ-20

ZERO BIAS TRIODE

20 WATTS PLATE DISSIPATION

\$2.25



GENERAL CHARACTERISTICS

Filament Volts	7.5
Filament Current, amps.....	1.75
Amplification Factor	62
Plate Dissipation, watts.....	20

Interelectrode Capacities

Grid-plate, mmf	4.95
Grid-filament, mmf	5.25
Plate Filament, mmf.....	1.0

Overall Dimensions


Maximum length, inches.....	6
Maximum diameter, inches.....	.234

UX 4-Prong Alsimag Base

The TZ20 is primarily designed for zero bias Class B audio operation and no bias is required for such operation at voltages up to 800. It is the ideal Class B audio tube for outputs up to 80 watts and 4 of them push pull parallel will form a most economical 160 watt modulator. For pushpull parallel operation the reflected load impedance will be half and the output twice that for two tubes. The Class B operating conditions for the TZ20 and TZ20 are identical but the TZ20 avoid the necessity for a source of grid bias with good voltage regulation. At 800 volts the no-signal plate current to a pair of TZ20's will be approximately 25 to 30mA.

The chart below gives proper Class B Audio operating conditions for various outputs at different plate voltages. The most important value is the reflected load impedance which is given for the entire primary or plate to plate. The current value is the maximum average value as would be indicated on the plate current meter with sine wave input. For the same peak output with voice input the maximum average plate current will be approximately 50% to 60% of this value. The TZ20 requires no bias voltage.

D.C. Plate Voltage ↓	40	50	60	70	←Audio Watts Output
800	78MA 21,000	98MA 17,000	117MA 14,000	137MA 12,000	←Max. Av. Ip. ←Plate to plate Load
700	92MA 15,000	115MA 12,000	140MA 10,000	←Max. Av. Ip. ←Plate to plate load	
600	113MA 10,200	140MA 8,100	←Max. Av. Ip. ←Plate to plate load		

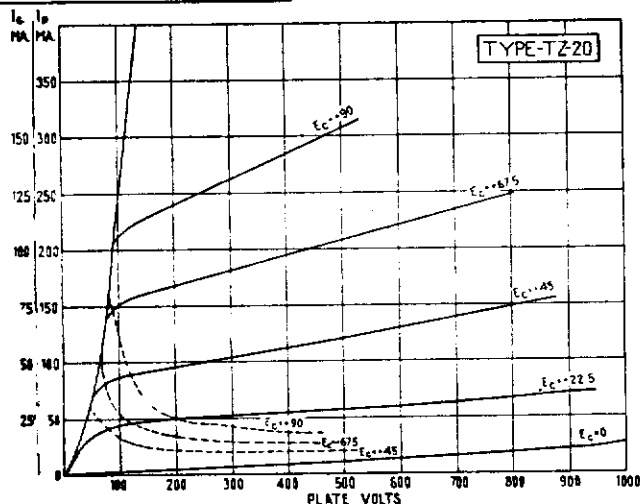

CLASS C TELEGRAPHY

Maximum Ratings

D. C. Plate Volts	750
D. C. Plate Current, ma.....	85
D. C. Grid Current, ma.....	30
D. C. Grid Volts	200
Plate Dissipation, watts.....	20

Typical Operating Conditions

D. C. Plate Volts	750
D. C. Plate Current, ma.....	85
D. C. Grid Current, ma.....	28
D. C. Grid Bias Volts.....	—40
From grid leak of, ohms.....	1500
Plate Dissipation, watts.....	20
Power Output, watts.....	44
Driving Power, watts.....	3.75

CLASS C TELEPHONY

Maximum Ratings

D. C. Plate Volts	750
D. C. Plate current, ma.....	75
D. C. Grid current, ma.....	30
D. C. Grid Volts	200
Plate Dissipation, watts.....	15

Typical Operating Conditions

D. C. Plate Volts	750
D. C. Plate current, ma.....	70
D. C. Grid current, ma.....	23
D. C. Grid Bias Volts.....	—100
From grid leak of, ohms.....	4500
Plate Dissipation, watts.....	15
Power Output, watts.....	38
Driving Power, watts.....	4.8

CLASS B AUDIO

Typical Operating Conditions (for two tubes)

D. C. Plate Volts	750
D. C. Plate Current, ma.....	170
D. C. Grid Bias Volts.....	0
Power Output, watts.....	80
Driving Power, watts.....	2.6
Plate to Plate load, ohms.....	9000
Peak A.F. Grid to Grid Volts.....	195

Taylor

CUSTOM
BUILT

Tubes

HD 203-A

150 WATTS PLATE DISSIPATION
CARBON ANODE TRIODE

\$14.50

The Heavy Duty 203A is truly a heavy duty tube and was the first tube designed with the floating anode. Before the introduction of the HD 203A punctures and flashing over in the stems of the standard 203A were very common especially in Class B audio circuits. The HD 203A is a general purpose tube and is used in circuits built for 203A tubes where more power is desired.

GENERAL CHARACTERISTICS

Filament Voltage, volts.....	10
Filament Current, amps.....	4
Amplification Factor.....	25
Plate to Grid, mmf.....	12
Thoriated Tungsten Filament—NONEX GLASS	
Maximum Length, inches.....	9½
Maximum Diameter, inches.....	2½

CLASS "C" AMPLIFIER

Max. Operating Plate Volts.....	1500	1750
Max. D.C. Plate Current, mls.....	225	225
Max. D.C. Grid Current, mls.....	60	60

CLASS "B" A.F. MODULATOR

Push Pull Operation

D.C. Plate Voltage, volts.....	1500	1750
Grid Voltage, appr. volts.....	—45	—67.5
Load Resistance (plt. to plt.) ohms.....	9600	10,000
Max. D.C. Plate Current (2 tubes), mls.....	315	365
Power Output (2 tubes), watts.....	300	400

814

200 WATTS PLATE DISSIPATION

\$18.50

Low Mu—Ideal for Grid Modulation
and Class B Linear Operation

The 814 is identical with the 822 except for the Mu or amplification factor and is intended for those applications where a tube of lower mu is desired. The mu of 12 is about optimum for grid modulated and class B linear R.F. operation. We recommend the 814 for efficiency modulated amplifiers.

CLASS B RADIO FREQUENCY AMPLIFIER

Typical Operating Conditions

D. C. Plate Volts.....	2000	2500
D. C. Plate Current, A.....	150	125
Power Output, watts.....	110	115
Grid Bias Volts.....	—165	—200
Peak Driving Power, watts (approx.).....	6	6
Plate Dissipation, watts.....	190	197

For other Operating Data refer to 822 on Page 7

841-SW

50 WATTS PLATE DISSIPATION
CARBON ANODE

A POPULAR DIATHERMY TUBE

\$8.00

The Taylor 841-SW has been used for the last ten years by many of the leading diathermy apparatus manufacturers.

GENERAL CHARACTERISTICS

Filament Voltage, volts.....	10
Filament Current, amps.....	2
Amplification Factor.....	14.6
Maximum Length, inches.....	6¼
Maximum Diameter, inches.....	2¾
Plate to Grid, mmf.....	8
Alsmag UX Base—NONEX GLASS	

CLASS "C" OSC AND POWER AMP

Max. Operating Plate Volts	
Unmodulated D.C., volts.....	1000
Max. D.C. Plate Current, mls.....	150
Max. D.C. Grid Current, mls.....	30
Max. Plate Dissipation, watts.....	50
Max. RF Grid Current, amps.....	5

HD 211-C

150 WATTS PLATE DISSIPATION
CARBON ANODE

\$14.50

Used in Diathermy equipment where voltage is limited so that higher current is permissible to obtain rated output.

GENERAL CHARACTERISTICS

Filament Voltage, volts.....	10
Filament Current, amps.....	4
Mutual Conductance, uMhos.....	4300
Amplification Factor.....	12
50 Watt Base	Nonex Glass
Max. length.....	9½ in.
Max. diameter.....	2½ in.

INTERELECTRODE CAPACITIES

Plate to Grid, mmf.....	9
Grid to Filament, mmf.....	5
Plate to Filament, mmf.....	4

CLASS "C" OSC. AND POWER AMP.

Max. Operating Plate Volts.....	2000
Max. D.C. Plate Current, mls.....	225
Max. D.C. Grid Current, mls.....	60
Max. Plate Dissipation, watts.....	150
Max. R.F. Grid Current, amps.....	7.5
Max. R.F. Output, watts.....	250

Engineering Cooperation

Taylor Tubes really welcomes the opportunity to work with your engineers on any problems involving Power or Rectifier Tubes of the types listed in this catalog. We have worked closely with the engineers of many leading industrial concerns to our mutual advantage. We can quickly build sample tubes to your own specifications at a reasonable cost. You can count on close cooperation at TAYLOR TUBES.

TAYLOR TUBES, Inc.
2312-18 Wabansia Avenue
Chicago 47, Illinois
Telephone ARMitage 1730

Foreign Representative
ROYAL NATIONAL CO.
Cable NATVARNCO
89 Broad Street
New York 4, N. Y.

TUBES WITH A REAL GUARANTEE

PRINTED IN U. S. A.
GENTRY PRINTING COMPANY

www.everything4lessstore.com